



Belden Coaxial Cables

Compare Belden coaxial cables with those from the other companies who produce them and you will discover the obvious: Belden has no equal. That's because Belden coaxial cables are time-tested for performance, performance that guarantees outstanding value. Belden guarantees this level of performance because every cable is tested with equipment that simulates every known environmental and electrical performance condition. As a result, Belden coaxial cable can be counted on for positive, reliable, and trouble-free operation. Engineered in a wide selection of sizes and materials, with each offering the benefits needed for physical, electrical and cost-requirement applications. Cable choices include broadband, standard analog, precision video for analog and digital, and more. For our complete line of Belden products, please visit www.Jameco.com/Belden.

50Ω Transmission and Computer Cable RG8/X & RG8/U Type

16 AWG stranded (19x29) .058" bare copper RG8/X type

- 95% bare copper braid shield
- Foam polyethylene insulation and black PVC jacket
- Nominal capacitance: 81.4pF/m • Nominal impedance: 50Ω
- Nominal outer diameter: .042" • Color: black



Part No.	Product No.	Description	1	5	10
734255CG	9258-100-10	100' reel	\$59.99	\$54.99	\$49.99
734257CG	9258-500-10	500' reel	346.55	314.47	298.73
734256CG	9258-1000-10	1000' reel	601.15	559.17	538.20
734259CG	9258-U500-10	500' unreel box	357.05	324.01	307.79
734258CG	9258-U1000-10	1000' unreel box	619.35	576.12	554.52

13 AWG stranded (7 x 21) .085" bare copper RG8/U type


- 97% bare copper braid shield
- Polyethylene insulation and black PVC jacket
- Nominal capacitance: 93.5pF/m • Nominal impedance: 52Ω
- Nominal outer diameter: .405" • Color: black



Part No.	Product No.	Description	1	5	10
732849CG	8237-100-10	100' reel	\$166.05	\$151.09	\$138.36
732857CG	8237-500-10	500' reel	629.09	571.86	549.03
732865CG	8237-1000-10	1000' reel	1,135.85	1,041.29	961.12

11 AWG stranded (7 x 19) .108" bare copper RG8/U type

- Nominal outer diameter: .285" • Color: black
- Foam polyethylene insulation & black PVC jacket • 97% bare copper braid shield
- Nominal capacitance: 85.3pF/m • Nominal impedance: 50Ω



Part No.	Product No.	Description	1	5	10
732751CG	8214-100-10	100' reel	\$178.55	\$162.30	\$148.77
732769CG	8214-500-10	500' reel	780.65	709.66	650.05
732777CG	8214-1000-10	1000' reel	1,303.55	1,203.17	1,117.27

50Ω Transmission and Computer Cable RG58A/U Type

20 AWG solid .032" bare copper

- Nominal outer diameter: .193" • Color: black
- Polyethylene insulation and black PVC jacket
- 95% tinned copper braid shield
- Nominal capacitance: 93.5pF/m • Nominal impedance: 51.5Ω



Part No.	Product No.	Description	1	5	10
732873CG	8240-100-10	100' reel	\$42.15	\$38.21	\$34.73
732882CG	8240-500-10	500' reel	166.75	151.50	138.88
732900CG	8240-1000-10	1000' reel	358.25	328.38	303.14
734176CG	8240-U500-10	500' unreel box	202.99	184.17	142.57
734175CG	8240-U1000-10	1000' unreel box	333.29	302.42	287.33

20 AWG stranded (19 x 33) .035" tinned copper

- 95% tinned copper braid shield
- Polyethylene insulation and black PVC jacket
- Nominal capacitance: 101pF/m • Nominal impedance: 50Ω
- Nominal outer diameter: .192" • Color: black



Part No.	Product No.	Description	1	5	10
732937CG	8259-100-10	100' reel	\$50.65	\$45.93	\$41.73
732945CG	8259-500-10	500' reel	174.95	164.95	159.95
732953CG	8259-1000-10	1000' reel	274.79	251.89	232.49

20 AWG stranded (19 x 32) .037" tinned copper

- 96% tinned copper braid shield
- Foam polyethylene insulation and black PVC jacket
- Nominal capacitance: 86.9pF/m • Nominal impedance: 53.5Ω
- Nominal outer diameter: .194" • Color: black



Part No.	Product No.	Description	1	5	10
732814CG	8219-100-10	100' reel	\$39.99	\$37.49	\$34.99
732822CG	8219-500-10	500' reel	257.99	234.47	214.89
732831CG	8219-1000-10	1000' reel	329.49	302.05	278.79

50Ω Transmission and Computer Cable RG174/U Type

26 AWG stranded (7 x 34) .019" bare copper-covered steel

- 90% tinned copper braid shield
- Polyethylene insulation and black PVC jacket
- Nominal capacitance: 101pF/m
- Nominal impedance: 50Ω
- Nominal outer diameter: .110" • Color: black



Part No.	Product No.	Description	1	5	10
732785CG	8216-100-10	100' reel	\$35.45	\$32.18	\$29.23
732793CG	8216-500-10	500' reel	114.19	103.64	94.16
732806CG	8216-1000-10	1000' reel	278.85	263.29	250.13

93Ω Coax Cable RG62A/U Type

22 AWG solid 0.025" bare copper-covered steel

- Insulation: semi-solid PE (polyethylene) 0.146" diameter
- Outer shield: braid bare copper 95% coverage
- Outer jacket: HDPE (high density polyethylene)
- Nominal impedance: 93Ω
- Tracer: solid 0.242" diameter • Color: black
- Nominal inductance: 0.116μH/ft. • Nominal capacitance: 13.5pF/ft.
- Nominal DCR: 41.2Ω/1000' • Max. operating voltage (non-UL): 300Vrms



Part No.	Product No.	Description	1	5	10
447849CG	9228-010-500	500' reel	\$173.35	\$164.65	\$156.45

75Ω Broadband Coax CATV Cable RG6/U Type

18 AWG solid .040" bare copper-covered steel

- Duobond® II +60% aluminum braid shield
- Gas injected foam polyethylene insulation and black PVC jacket
- Nominal capacitance: 53.1pF/m • Nominal impedance: 75Ω
- Nominal outer diameter: .270" • Color: black



Part No.	Product No.	Description	1	5	10
733270CG	9116-100-10	100' reel	\$20.89	\$17.56	\$16.68
733278CG	9116-500-10	500' reel	65.55	57.37	54.50
733286CG	9116-1000-10	1000' reel	119.45	113.48	107.80
447831CG	9116-U500-010	500' unreel box	55.59	51.11	48.55
447822CG	9116-U1000-010	1000' unreel box	80.79	74.99	71.73

18 AWG solid .040" bare copper-covered steel

- Duobond® IV quad shield
- Nominal outer diameter: .298"
- Gas injected foam polyethylene insulation and black PVC jacket
- Nominal capacitance: 53.1pF/m • Nominal impedance: 75Ω • Color: black



Part No.	Product No.	Description	1	5	10
732734CG	1189A-100-10	100' reel	\$40.85	\$36.73	\$33.05
733403CG	1189A-500-10	500' reel	83.99	67.87	64.48
732742CG	1189A-1000-10	1000' reel	183.45	174.27	165.55
734053CG	1189A-U500-10	500' unreel box	100.99	81.61	77.53
447110CG	1189A-U1000-10	1000' unreel box	117.89	107.96	102.83

Series 59 MATV Cable

20 AWG solid 0.032 bare copper covered steel

- Insulation: gas-injected FPE (foam polyethylene 0.144" diameter)
- Outer shield: Duobond® II tape/braid 40% coverage
- Outer jacket: PVC
- UL1685 flame test • Color: black
- Nominal impedance: 75Ω • Nominal inductance: 0.097μH/ft.
- Nominal capacitance: 16.2pF/ft. • Nominal DCR: 44.5Ω / 1000'



Part No.	Product No.	Description	1	5	10
447806CG	9100-010-U1000	1000' unreel	\$68.65	\$64.99	\$60.92

This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

BELDEN Belden Coaxial Cables (Continued)

Precision Video Cable for Analog and Digital RG6 Type

18 AWG solid .040" bare copper

- Gas injected foam HDPE insulation, PVC jacket
- Nominal capacitance: 53.1pF/m • Nominal impedance: 75Ω
- DuoFoil® +95% tinned copper braid shield • Nominal outer diameter: .275"

Part No.	Product No.	Description	1	5	10
734100CG	1694A-100-10	100' reel (black)	\$66.49	\$55.86	\$53.07
734156CG	1694A-500-10	500' reel (black)	234.89	191.33	177.23
734155CG	1694A-1000-10	1000' reel (black)	488.39	396.49	382.18
447267CG	1694A-1000-06	1000' reel (blue)	433.79	388.73	331.84
447275CG	1694A-1000-08	1000' reel (gray)	485.95	437.34	393.60

Direct Broadcast Satellite RG6 Type Cable

18 AWG solid .040" bare copper

- DuoBond® II +60% aluminum braid • Color: black
- Gas injected foam polyethylene insulation, PVC jacket
- Nominal capacitance: 16.2pF/m • Nominal impedance: 75Ω

Part No.	Product No.	Description	1	5	10
734157CG	1829AC-100-10	100' reel	\$14.99	\$13.99	\$12.99
734178CG	1829AC-500-10	500' reel	54.99	52.24	49.63
734158CG	1829AC-1000-10	1000' reel	123.25	110.88	105.34
447312CG	1829A-U1000-010	1000' unreel box	82.59	79.99	73.28

75Ω Standard Analog Video Cable RG59/U Type

23 AWG solid .023" bare copper

- 95% bare copper braid shield
- Polyethylene insulation and black PVC jacket • Nominal outer diameter: .242"
- Nominal capacitance: 67.3pF/m • Nominal impedance: 75Ω • Color: black

Part No.	Product No.	Description	1	5	10
732902CG	8241-100-10	100' reel	\$53.75	\$50.46	\$46.52
732911CG	8241-500-10	500' reel	141.55	132.81	122.47
732929CG	8241-1000-10	1000' reel	224.15	214.17	205.39
447478CG	8241-U500-10	500' unreel box	155.15	139.62	125.65
447460CG	8241-U1000-10	1000' unreel box	305.49	274.92	247.42

22 AWG stranded (7 x 30) .030" bare copper

- 95% bare copper braid shield
- Foam polyethylene insulation and black PVC jacket
- Nominal capacitance: 56.7pF/m • Nominal impedance: 75Ω
- Nominal outer diameter: .241" • Color: black

Part No.	Product No.	Description	1	5	10
732654CG	9259-100-10	100' reel	\$56.79	\$53.04	\$48.86
732662CG	9259-500-10	500' reel	156.55	142.23	139.40
732671CG	9259-1000-10	1000' reel	383.19	369.43	350.45
734071CG	9259-U500-10	500' unreel box	196.85	178.84	175.29
734070CG	9259-U1000-10	1000' unreel box	383.19	369.43	350.45

Broadband Coax (Headend/Video Cables)

20 AWG solid .031" bare copper

- Nominal capacitance 68.9pF/m • Color: black
- Nominal outer diameter: .305" • Nominal impedance: 75Ω
- 98% tinned copper double braid shield • Polyethylene insulation and jacket

Part No.	Product No.	Description	1	5	10
732962CG	8281-100-10	100' reel	\$85.49	\$72.06	\$68.46
732980CG	8281-500-10	500' reel	483.25	414.18	372.43
732988CG	8281-1000-10	1000' reel	906.39	773.15	739.32

50Ω RG58A/U Ethernet Coax (Thinnet 10 Base2 Ethernet)

20 AWG stranded (19 x 32) tinned copper, plenum

- Insulation: FFEP (foam fluorinated ethylene propylene, 0.095" diameter)
- Outer shield: DuoBond® II tape/braid 93% coverage
- NFPA 262 UL flame test
- Color: light gray
- Outer jacket: PVDF (fluorocopolymer) • IEEE802.3 10Base2 specification
- Nominal impedance: 50Ω • Nominal capacitance: 25.4pF/ft.
- Nominal inductance: 0.0635μH/ft. • Nominal DCR: 8.8Ω/1000'

Part No.	Product No.	Description	1	5	10
426001CG	89907-E4X-1000	1000' reel	\$659.59	\$593.62	\$534.25

BELDEN Belden Coaxial Cables (Continued)

RG59 Type Security Coaxial Cable

20 AWG solid bare copper conductor

- 95% bare copper braid shield • Nominal impedance: 75Ω
- Foam polyolefin insulation and black UV resistant PVC jacket
- Impregnated with CoreGuard® flame retardant flooding compound
- Shielded or flooded for use in underground ducts
- Surveillance and CCTV applications • Color: black

Part No.	Product No.	Description	1	5	10
734159CG	543945-100-10	100' reel	\$15.45	\$15.35	\$15.25
734161CG	543945-500-10	500' reel	64.95	61.98	58.92
734160CG	543945-1000-10	1000' reel	139.99	132.27	125.66

Standard Analog Video Cable 75Ω Miniature Coax

27 AWG stranded (7x35) .017" bare copper-covered steel

- Polyethylene insulation and black PVC jacket
- Nominal capacitance: 67.3pF/m • Color: black
- Nominal impedance: 75Ω • Nominal outer diameter: .100"

Part No.	Product No.	Description	1	5	10
734174CG	8218-U500-10	500' unreel box	\$217.09	\$196.96	\$178.98
734173CG	8218-U1000-10	1000' unreel box	534.15	484.61	460.38

20 AWG solid .032" solid bare copper

- Duofoil® +95% tinned copper braid shield
- Gas injected foam HDPE insulation and PVC jacket
- Nominal capacitance: 53.5pF/m • Nominal impedance: 75Ω
- Nominal outer diameter: .234" • Color: black

Part No.	Product No.	Description	1	5	10
734087CG	1505A-100-10	100' reel	\$51.05	\$42.89	\$40.75
734089CG	1505A-500-10	500' reel	214.35	174.59	173.96
734088CG	1505A-1000-10	1000' reel	435.29	359.73	358.14

BELDEN

Belden Speaker Cables

These speaker cables are used to connect receivers or power amplifiers to speakers & are also used for the internal wiring of the speakers. Belden speaker cables utilize only high-conductivity copper produced by a process called Electrolytic Tough Pitch (ETP). This refining process produces a conductor that is 99.95% pure copper resulting in high-conductivity per ASTM B115.

Electrolytic Tough Pitch (ETP) High Conductivity Copper Speaker Cables

- 2-conductor stranded • Clear PVC jacket
- Parallel (1) tinned (1) bare • PVC insulation

18 AWG stranded (16 x 30)

Part No.	Product No.	Description	1	5	10
732574CG	9708-100-368	100' reel	\$27.15	\$24.65	\$22.59
732582CG	9708-500-368	500' reel	122.95	116.45	109.99
732591CG	9708-1000-368	1000' reel	283.55	270.87	259.77
734154CG	9708-U500-368	500' unreel box	181.95	172.33	162.77
734081CG	9708-U1000-368	1000' unreel box	339.85	324.70	311.39

14 AWG stranded (19 x 27)

Part No.	Product No.	Description	1	5	10
732603CG	9717-100-368	100' reel	\$65.49	\$55.09	\$49.45
733430CG	9717-500-368	500' reel	255.69	242.25	218.04
732612CG	9717-1000-368	1000' reel	539.85	509.72	458.88

12 AWG stranded (65 x 30)

Part No.	Product No.	Description	1	5	10
732630CG	9718-100-368	100' reel	\$126.35	\$106.13	\$100.82
732638CG	9718-500-368	500' reel	405.25	358.42	310.77
732646CG	9718-1000-368	1000' reel	1,341.25	1,262.34	1,183.44

Lowest Price Guarantee

Have you found a product at a lower print-advertised price? We'll beat that price by 10%, right down to our cost!

• This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

RoHS compliant product This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 1.



Belden cable products are manufactured in a variety of gauge sizes, dimensions, insulation materials, shielding configurations, and jacketing materials including PVC, Plenum and High-Temperature versions to meet the technical requirements of many different types of systems. Paired cables allow balanced signal transmission, which results in lower crosstalk through common mode rejection. Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than other multi-conductor cables. For our complete line of Belden products, please visit www.jameco.com/Belden.

- Chrome PVC jacket
- Tinned copper
- Twisted pairs
- Tinned copper drain wire
- Overall 100% BELDFOIL® shield (for shielded cables)

High-Temperature Control, Instrumentation Cables and Computer Cables

24 AWG stranded (7 x 32) shielded with 24 AWG stranded TC drain wire

- Semi-rigid PVC insulation
- Nominal DCR: 24Ω/m
- Nominal impedance: 75Ω
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	5	10
732710CG	9501-100-60 R	1	100' reel	\$23.85	\$21.64	\$19.68
732718CG	9501-500-60 R	1	500' reel	92.05	87.14	82.31
732726CG	9501-1000-60 R	1	1000' reel	174.35	164.62	152.71
734074CG	9501-U500-60 R	1	500' unreel box	108.79	103.00	97.29
734073CG	9501-U1000-60 R	1	1000' unreel box	166.15	156.86	147.62
732452CG	9502-100-60 R	2	100' reel	27.39	24.92	22.64
732470CG	9502-500-60 R	2	500' reel	140.39	127.60	116.96
732478CG	9502-1000-60 R	2	1000' reel	283.49	259.90	239.88
734076CG	9502-U500-60 R	2	500' unreel box	155.99	141.75	129.94
734075CG	9502-U1000-60 R	2	1000' unreel box	199.99	189.59	175.89
732486CG	9503-100-60 R	3	100' reel	37.35	31.72	29.51
732494CG	9503-500-60 R	3	500' reel	137.99	130.72	123.48
732507CG	9503-1000-60 R	3	1000' reel	261.45	246.93	229.06
734078CG	9503-U500-60 R	3	500' unreel box	226.39	214.44	202.58
734077CG	9503-U1000-60 R	3	1000' unreel box	408.35	385.65	366.38
732515CG	9504-100-60 R	4	100' reel	32.99	27.95	27.15
732523CG	9504-500-60 R	4	500' reel	168.69	159.79	150.92
732532CG	9504-1000-60 R	4	1000' reel	415.15	392.05	381.85
732550CG	9505-100-60 R	5	100' reel	45.49	36.85	34.28
732558CG	9505-500-60 R	5	500' reel	192.25	174.78	160.19
732566CG	9505-1000-60 R	5	1000' reel	370.55	339.72	313.56
734079CG	9505-U500-60 R	5	500' unreel box	311.25	294.84	278.43
734080CG	9505-U1000-60 R	5	1000' unreel box	589.69	556.87	529.03

Low Capacitance Computer Cables

24 AWG stranded (7 x 32) shielded with 24 AWG stranded TC drain wire

- Datalene® insulation, chrome PVC jacket
- Nominal DCR: 24Ω/m
- Nominal impedance: 100Ω
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	5	10
734179CG	1419A-100-60 R	2	100' reel	\$24.99	\$22.49	\$19.99
734086CG	1419A-500-60 R	2	500' reel	144.05	131.99	113.03
734085CG	1419A-1000-60 R	2	1000' reel	264.55	242.43	223.76
447128CG	1422A-060-500▲	5	500' reel	295.85	266.24	239.61

Audio, Control, and Instrumentation Cables Non-Plenum

22 AWG stranded (7 x 30) shielded with 22 AWG stranded TC drain wire

- Polypropylene insulation
- Paper wrap
- Black PVC jacket
- Nominal capacitance: 111pF/m
- Nominal outer diameter: 0.138"



Part No.	Product No.	No. of Pairs	Description	1	5	10
733112CG	8451-100-10 R	1	100' reel (black).....	\$19.99	\$18.59	\$16.99
733121CG	8451-500-10 R	1	500' reel (black).....	113.65	103.31	94.69
733139CG	8451-1000-10 R	1	1000' reel (black)	149.95	142.95	135.95
734063CG	8451-U500-10 R	1	500' unreel box (black) ..	113.65	103.31	94.69
734062CG	8451-U1000-10 R	1	1000' unreel box (blk) ..	202.85	185.95	171.62
447531CG	8451-U1000-08▲	1	1000' unreel box (gray) ..	202.85	185.95	171.62

Audio, Control, and Instrumentation Cables Non-Plenum (Cont'd)

22 AWG stranded (7 x 30) shielded with 22 AWG stranded TC drain wire

- Polypropylene insulation
- PVC jacket
- Nominal capacitance: 111pF/m
- Nominal outer diameter: 0.135"
- Color: gray



Part No.	Product No.	No. of Pairs	Description	1	5	10
732689CG	9451-100-08 R	1	100' reel	\$24.99	\$22.49	\$19.99
732697CG	9451-500-08 R	1	500' reel	92.85	82.50	75.28
733412CG	9451-T1000-08 R	1	1000' reel	147.99	143.13	135.97
447881CG	9451-U1000-10▲	1	1000' unreel box ..	153.29	152.00	147.26

22 AWG stranded (7 x 30) shielded with 22 AWG stranded TC drain wire

- Polyethylene insulation and chrome PVC jacket
- Nominal capacitance: 79pF/m
- Nominal outer diameter: 0.175"
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	5	10
734191CG	8761-500-60 R	1	500' reel	\$112.05	\$101.59	\$92.33
734190CG	8761-1000-60 R	1	1000' reel	285.35	261.58	241.45
734193CG	8761-U500-60 R	1	500' unreel box	150.25	134.42	126.51
734192CG	8761-U1000-60 R	1	1000' unreel box ..	271.49	232.42	221.41

22 AWG stranded (7 x 30) shielded with 24 AWG stranded TC drain wire

- Polypropylene insulation
- Nominal capacitance: 115pF/m
- Nominal outer diameter: 0.168"
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	5	10
734180CG	8723-100-60 R	2	100' reel	\$30.19	\$27.17	\$24.15
734182CG	8723-500-60 R	2	500' reel	114.15	103.55	94.09
734181CG	8723-1000-60 R	2	1000' reel	207.49	190.25	175.59
734184CG	8723-U500-60 R	2	500' unreel box	114.15	103.55	94.09
734183CG	8723-U1000-60 R	2	1000' unreel box ..	324.59	306.79	289.79

20 AWG stranded (7 x 28) unshielded

- Chrome PVC jacket
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	2	5
734172CG	8205-U500-60 R	1	500' unreel box	\$97.79	\$80.93	\$76.77
734171CG	8205-U1000-60 R	1	1000' unreel box ..	223.35	204.74	188.99

20 AWG stranded (7 x 28) shielded with 22 AWG stranded TC drain wire

- Semi-rigid PVC insulation and overall chrome PVC jacket
- Nominal capacitance: 180pF/m
- Nominal outer diameter: 0.300"
- Color: chrome



Part No.	Product No.	No. of Pairs	Description	1	5	10
734260CG	9402-100-60 R	2	100' reel	\$64.99	\$62.49	\$59.99
734262CG	9402-U500-60 R	2	500' unreel box	409.29	381.99	354.70
734261CG	9402-1000-60 R	2	1000' reel	944.85	865.45	798.82

18 AWG stranded (16 x 30) shielded with 20 AWG stranded TC drain wire

- Tinned copper, twisted pair
- Color: chrome
- Polyethylene insulation with chrome PVC jacket
- Nominal capacitance: 79pF/m
- Nominal outer diameter: 0.222"



Part No.	Product No.	No. of Pairs	Description	1	5	10
734185CG	8760-100-60 R	1	100' reel	\$34.99	\$32.49	\$29.99
447671CG	8760-250-60▲	1	250' reel	76.39	69.33	58.15
734187CG	8760-500-60 R	1	500' reel	158.29	143.63	130.51
734186CG	8760-1000-60 R	1	1000' reel	384.25	364.06	345.85
734189CG	8760-U500-60 R	1	500' unreel box	112.89	107.22	103.84
734188CG	8760-U1000-60 R	1	1000' unreel box ..	231.19	219.05	207.99

▲ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

Paired Cable (Continued)

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

RoHS RoHS Compliant Product
RoHS Also Available

Details on Page 1

Color Code Legend
New Sale Lower\$ QtySave



Belden Paired Cables (Continued)

Unshielded Audio, Control and Instrumentation Cable

16 AWG stranded (19 x 29) tinned copper

- Insulation & outer jacket: PVC
- UL1685 FT4 flame test
- Nominal inductance: 0.184µH/ft.
- Nominal capacitance: 16.4pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal DCR: 4.49Ω/1000'
- Max. current: 7.1A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447540CG	8471-060-1000▲	1	1000' reel	\$466.65	\$443.29	\$421.09

14 AWG stranded (42 x 30) tinned copper

- Insulation & outer jacket: PVC
- UL1685 flame test
- Nominal inductance: 0.19µH/ft.
- Nominal capacitance: 33pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal DCR: 2.86Ω/1000'
- Max. current: 9.6A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447558CG	8473-060-500▲	1	500' unreel	\$427.65	\$384.86	\$346.37

Paired Line Level Analog Audio Cable

20 AWG stranded (7 x 28) with 20 AWG stranded TC drain wire

- Polyethylene insulation with chrome PVC jacket
- Nominal capacitance: 89pF/m
- Nominal outer diameter: 0.204"
- Color: chrome

Part No.	Product No.	Pairs	Description	1	5	10
734195CG	8762-100-60 R	1	100' reel	\$32.95	\$32.60	\$32.50
734197CG	8762-500-60 R	1	500' reel	146.05	138.32	130.64
734196CG	8762-1000-60 R	1	1000' reel	260.99	246.49	232.02
734199CG	8762-U500-60 R	1	500' unreel box	137.79	130.51	123.27
734198CG	8762-U1000-60 R	1	1000' unreel box	335.45	316.83	298.19

16 AWG stranded (19 x 29) shielded with 18 AWG stranded TC drain wire

- Polyethylene insulation
- Nominal capacitance: 75pF/m
- Nominal outer diameter: 0.313"
- Color: chrome

Part No.	Product No.	Pairs	Description	1	5	10
733147CG	8719-100-60 R	1	100' reel	\$59.99	\$54.99	\$49.99
733155CG	8719-500-60 R	1	500' reel	267.09	242.34	220.34
733163CG	8719-1000-60 R	1	1000' reel	443.85	418.46	393.10
734065CG	8719-U500-60 R	1	500' unreel box	198.65	180.24	163.88
734064CG	8719-U1000-60 R	1	1000' unreel box	579.05	545.91	512.83

14 AWG stranded (19 x 27) shielded with 16 AWG stranded TC drain wire

- Polyethylene insulation
- Nominal capacitance: 79pF/m
- Nominal outer diameter: 0.355"
- Color: chrome

Part No.	Product No.	Pairs	Description	1	5	10
733172CG	8720-100-60 R	1	100' reel	\$59.99	\$51.55	\$48.97
733190CG	8720-500-60 R	1	500' reel	298.85	279.32	259.83
733198CG	8720-1000-60 R	1	1000' reel	621.75	578.37	563.91
734066CG	8720-U500-60 R	1	500' unreel box	416.99	389.78	362.59

Two Conductor Low Impedance Cable

20 AWG stranded (26 x 34) high conductivity tinned copper

- Insulation: EPDM 0.083" diameter
- Overall cabling separator: rayon braid
- Outer shield: braid tinned copper 85% coverage
- Outer shield separator material: cotton wrap
- Outer jacket: EPDM (ethylene propylene diene monomer rubber)
- Nominal impedance: 52Ω
- Nominal capacitance: 30pF/ft.
- Max. operating voltage: 600Vrms
- Color: black
- Nominal inductance: 0.18µH/ft.
- Nominal DCR: 3.06Ω/1000'
- Max. current: 4A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
425922CG	8412-010-100▲	1	100' reel	\$117.45	\$105.70	\$95.13

▲ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.



Belden Paired Cables (Continued)

New Generation® Commercial Audio System Cable

18 AWG stranded (7 x 26) bare copper with rip cord (unshielded)

- Suitable applications: addressable fire alarm systems, data circuits, monitor/detection, control circuits, initiating circuits, notification circuits
- Insulation: PVC 0.010" diameter
- UL1666 vertical shaft flame test
- Nominal capacitance: 30pF/ft.
- Max. operating voltage: 300Vrms
- Color: gray
- Outer jacket: PVC with rip cord
- Nominal inductance: 0.16µH/ft.
- Nominal DCR: 6.5Ω/1000'
- Max. current: 5A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447398CG	5300UE-008-U500▲	1	500' unreel	\$41.75	\$39.59	\$33.99
447380CG	5300UE-008-U1000▲	1	1000' unreel	79.85	75.79	65.06

CM Rated Cable

22 AWG stranded (7 x 30) tinned copper with 22 AWG stranded tinned drain wire

- Inner shield: Beldfoil® (Z-fold®) aluminum foil – polyester tape 100% coverage
- Insulation: PP (polypropylene)
- Color: chrome
- Outer jacket: PVC
- UL1685 flame test
- Nominal impedance: 50Ω
- Nominal capacitance: 30pF/ft.
- Max. operating voltage: 300Vrms
- Nominal inductance: 0.18µH/ft.
- Nominal DCR: 15Ω/1000'
- Max. current: 2A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447726CG	8777-060-500▲	3	500' reel	\$286.49	\$270.00	\$266.00
447718CG	8777-060-1000▲	3	1000' reel	555.05	540.00	521.95
447734CG	8778-060-500▲	6	500' reel	545.79	518.49	499.99

Flexible CM Rated Cable

24 AWG stranded (7 x 32) tinned copper with 24 AWG TC drain wire

- Inner shield: Beldfoil® aluminum foil – polyester tape 100% coverage with 24AWG (7 x 32) tinned copper drain wire
- Outer shield: Beldfoil® aluminum foil – polyester tape 100% coverage with 18 AWG (7 x 26) tinned copper drain wire
- Insulation: PO (polyolefin)
- Inner and outer jacket: PVC
- Nominal capacitance: 31pF/ft.
- Max. operating voltage: 300Vrms
- Color: Black
- Nominal inductance: 0.18µH/ft.
- Nominal DCR: 23.3Ω/1000'
- Max. current: 1.05A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447161CG	1510C-B59-500▲	4	500' reel	\$544.49	\$517.19	\$491.35

Audio, Control and Instrumentation Cable

22 AWG solid tinned copper with 22 AWG solid TC drain wire

- Insulation & outer jacket: PVC
- Inner shield: Beldfoil® aluminum foil – polyester tape 100% coverage w/ 22AWG solid tinned copper drain wire
- Nominal inductance: 0.19µH/ft.
- Nominal capacitance: 40pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal DCR: 16.7Ω/1000'
- Max. current: 1.5A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447697CG	8764-060-1000▲	9	1000' reel	\$2,294.95	\$2,271.88	\$2,249.16

14 AWG stranded (42 x 30) tinned copper

- Insulation & outer jacket: PVC
- Inner shield: Beldfoil® (Z-fold®) aluminum foil – polyester tape 100% coverage
- Nominal capacitance: 40pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal inductance: 0.19µH/ft.
- Nominal DCR: 16.7Ω/1000'
- Max. current: 2A per conductor

Part No.	Product No.	Pairs	Description	1	5	10
447700CG	8768-060-500▲	6	500' reel	\$452.89	\$430.19	\$408.69

Free Technical Support

Our knowledgeable Tech Support department is ready to answer your questions. Just call us! 1-800-831-4242

RoHS compliant product This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. Details on page 1.

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

Paired Cable & Hook-up Wire



Belden Paired Cables (Continued) Shielded Audio, Control and Instrumentation Cable

24 AWG stranded (7 x 32) tinned copper with 24 AWG tinned copper drain wire

- UL1685 flame test
- Outer shield: Beldfoil® aluminum foil – polyester tape 100% coverage
- Outer jacket: PVC
- Nominal impedance: 52Ω
- Nominal capacitance: 31pF/ft.
- Max. operating voltage: 300Vrms
- Color: Black
- Insulation: PP (polypropylene)
- Nominal inductance: 0.17μH/ft.
- Nominal DCR: 23.5Ω/1000'
- Max. current: 2A per conductor



Part No.	Product No.	Pairs	Description	1	5	10
447339CG	1883A-010-U1000▲	1	1000' unreel	\$162.29	\$153.27	\$145.59

Audio Alarm and Security Cable

14 AWG stranded (19 x 27) bare copper (unshielded)

- Suitable applications: intercom/PA systems, sound/audio systems, fire alarms
- Insulation: PVC 0.014" diameter
- UL1666 vertical riser flame test
- Nominal capacitance: 31pF/ft.
- Max. operating voltage: 300Vrms
- Color: gray
- Outer jacket: PVC
- Nominal inductance: 0.15μH/ft.
- Nominal DCR: 2.53Ω/1000'
- Max. current: 8A per conductor



Part No.	Product No.	Pairs	Description	1	5	10
447355CG	5100UE-008-500▲	1	500' reel	\$98.85	\$93.63	\$88.95

16 AWG stranded (19 x 29) bare copper (unshielded)

- Suitable applications: addressable fire systems, data circuits, monitor/detection, control circuits, initiating circuits, notification circuits
- Insulation: PVC 0.010" diameter
- UL1666 vertical riser flame test
- Nominal capacitance: 33pF/ft.
- Max. operating voltage: 300Vrms
- Color: gray
- Outer jacket: PVC
- Nominal inductance: 0.15μH/ft.
- Nominal DCR: 4.2Ω/1000'
- Max. current: 6.25A per conductor



Part No.	Product No.	Pairs	Description	1	5	10
447363CG	5200UE-008-1000▲	1	1000' reel	\$107.39	\$101.99	\$96.89
447371CG	5200UE-008-500▲	1	500' reel	53.75	50.99	43.78

Low Capacitance Cable For EIA RS-232/422 Applications

24 AWG stranded (7 x 32) tinned copper with 24 AWG stranded tinned copper drain wire

- Insulation: Datalene® FPE (foam polyethylene)
- Outer shield: Beldfoil® aluminum foil – polyester tape w/ shorting fold, braid tinned copper 65% coverage
- Outer jacket: PVC
- UL1685 flame test
- Nominal capacitance: 12.5pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal impedance: 100Ω
- Nominal DCR: 24Ω/1000'
- Max. current: 1.5A per conductor



Part No.	Product No.	Pairs	Description	1	5	10
447443CG	8107-060-100▲	7	100' reel	\$198.39	\$179.98	\$170.99

24 AWG stranded (7 x 32) tinned copper with 24 AWG stranded tinned copper drain wire

- UL1685 flame test
- Insulation: Datalene® FPE (foam polyethylene)
- Outer shield: Beldfoil® aluminum foil – polyester tape w/ shorting fold, braid tinned copper 65% coverage
- Outer jacket: PVC
- Nominal capacitance: 12.5pF/ft.
- Max. operating voltage: 300Vrms
- Color: Chrome
- Nominal impedance: 100Ω
- Nominal DCR: 24Ω/1000'
- Max. current: 1.1A per conductor



Part No.	Product No.	Pairs	Description	1	5	10
447451CG	8110-060-100▲	10	100' reel	\$230.89	\$209.48	\$199.99

Composite Data, Audio, Video, Security and Control Cable

Two RG6 18 AWG solid bare copper conductors and two 4-pair UTP 24 AWG solid bare copper conductors

- Gas injected FPR insulation coax cable, polyolefin insulation CAT5e cable and F-R PVC jackets
- Component nominal outer diameter: .200"
- Banana Peel™ jacketless cables
- Color: black



Part No.	Product No.	Description	1	5	10
734164CG	7913S-500	500' reel	\$279.85	\$264.83	\$262.53
734163CG	7913S-1000	1000' reel	700.85	682.06	663.31



Belden Paired Cables (Continued) Paired DataTwist® Category 5e UTP Cable

TIA/EIA – 568-B.2, unbonded-pair cable

- 4 pair unshielded
- 24 AWG solid
- Maximum DCR per 100m – 9.38Ω
- Input impedance: 100Ω



1585A series:

- Plenum, FEP Teflon® insulation, Flamarrst® jacket
- Nominal outer dia.: 0.200"

1583A series:

- Non-plenum, polyolefin insulation, PVC jacket
- Nominal outer dia.: 0.214"

Part No.	Product No.	Color	Description	1	5	10
734093CG	1585A-100-877	Natural	100' reel	\$29.99	\$28.49	\$26.99
734095CG	1585A-500-877	Natural	500' reel	129.99	114.99	99.99
734094CG	1585A-1000-877	Natural	1000' reel	199.99	182.49	181.89
734096CG	1585A-U1000-877	Natural	1000' unreel box	199.99	189.99	179.99
734097CG	1585A-U100-D15	Blue	100' unreel box	29.99	28.49	26.99
734099CG	1585A-U500-D15	Blue	500' unreel box	129.99	114.99	99.99
734098CG	1585A-U1000-D15	Blue	1000' unreel box	199.99	189.99	179.99
734090CG	1583A-100-06	Blue	100' reel	15.15	13.61	12.25
734177CG	1583A-500-06	Blue	500' reel	71.19	64.05	57.65
734091CG	1583A-1000-06	Blue	1000' reel	142.35	128.11	115.30
734092CG	1583A-U1000-06	Blue	1000' unreel box	117.65	116.46	115.30
447179CG	1583A-U1000-02▲	Red	1000' unreel box	83.19	74.22	66.32
447187CG	1583A-U1000-03▲	Orange	1000' unreel box	116.95	105.95	94.95
447195CG	1583A-U1000-04▲	Yellow	1000' unreel box	83.19	74.22	66.32
447208CG	1583A-U1000-05▲	Dk. green	1000' unreel box	83.19	74.22	66.32
447216CG	1583A-U1000-09	White	1000' unreel box	83.19	74.22	66.32
447224CG	1583A-U1000-10	Black	1000' unreel box	119.95	114.95	109.95
447232CG	1583A-U1000-F6H▲	Dk. gray	1000' unreel box	90.45	85.89	81.59



Belden Hook-Up Wire

UL AWM Style 1007

Belden hook-up and lead wire products are manufactured in a variety of materials, sizes, and designs to meet rigid industry and government specifications. Used in a wealth of applications including inter-connection circuits, internal wiring of computer and data processing equipment, appliances, and automotive. AWM, or Appliance Wiring Material, is Underwriter Laboratories' recognized covering of insulated wires and cables intended for internal wiring of appliances and equipment.

- Rated 105°C, 300V; 600V peak for electronic circuits and electrical equipment
- Tinned copper
- PVC insulated
- Increments of 100' or 1000' reels



Use the color code chart below to replace the "xx" when ordering

02 – Brown	03 – Red	04 – Orange	05 – Yellow	06 – Green
08 – Violet	09 – Gray	10 – White	11 – Black	14 – Dark blue

e.g. 734602CG – 7346 is the Jameco designation for 28 AWG stranded wire and 02 is for color brown

Part No.	Product No.	Description	1	5	10
7346xxCG	9928-100-xx	28 AWG (7 x 36) stranded	\$17.65	\$15.94	\$14.26
7345xxCG	9926-100-xx	26 AWG (7 x 34) stranded	16.85	15.25	13.84
7344xxCG	9923-100-xx	*24 AWG (7 x 32) stranded	15.89	14.44	13.08
7343xxCG	9921-100-xx	22 AWG (7 x 30) stranded	14.79	13.51	12.26
7342xxCG	9919-100-xx	20 AWG (7 x 28) stranded	23.69	21.48	19.55
7341xxCG	9918-100-xx	18 AWG (16 x 30) stranded	20.39	19.19	16.79
7340xxCG	9916-100-xx	16 AWG (26 x 30) stranded	38.79	31.52	29.14
447902CG	9923-1000-02▲	24 AWG (7 x 32) stranded red ...	101.35	96.64	91.94
447911CG	9923-1000-07▲	24 AWG (7 x 32) stranded violet ..	91.55	83.66	76.91

* Not available in violet, gray or dark blue

Order Anytime, Day or Night

Our friendly Sales department will assist you 24x7x365 by phone, fax, web or email. 1-800-831-4242

▲ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.



Bus Bar Hook-Up Wire

In accordance with performance requirements of Federal Specs. QQ-W343G.

- Solid tinned copper, single conductor
- Nominal outer diameter: 24 AWG – .021"; 22 AWG – .026"; 20 AWG – .033"

Part No.	Product No.	Description	1	5	10
734169CG	8022-100	24 AWG, 100' reel	\$13.45	\$12.95	\$11.95
734170CG	8022-1000	24 AWG, 1000' reel	70.55	56.99	52.62
734167CG	8021-100	22 AWG, 100' reel	13.45	10.81	9.77
734168CG	8021-1000	22 AWG, 1000' reel	91.39	77.91	72.05
734165CG	8020-100	20 AWG, 100' reel	13.29	11.67	10.55
734166CG	8020-1000	20 AWG, 1000' reel	141.49	120.59	111.51



Belden Multi-Conductor Cables

Audio, Control and Instrumentation Cable

22 AWG stranded (7 x 30) tinned copper (unshielded)

- Insulation and outer jacket: PVC
- Color: Chrome
- Nominal inductance: 0.17µH/ft.
- Nominal capacitance: 34pF/ft.
- Max. operating voltage: 300Vrms
- Nominal DCR: 15.6Ω/1000'
- Max. current: 2.1A per conductor

Part No.	Product No.	Conductors	Description	1	5	10
447873CG	9430-060-U1000	7	1000' unreel	\$387.05	\$351.16	\$333.59

Computer Cable For EIA RS-232 Applications

24 AWG stranded (7 x 32) tinned copper with 24 AWG stranded TC drain wire

- Insulation and outer jacket: PVC
- Color: Chrome
- Nominal DCR: 25Ω/1000'
- Nominal capacitance: 33pF/ft.
- Outer shield: Beldfoil® aluminum foil-polyester tape 100% coverage
- Max. operating voltage: 300Vrms
- Max. current: 1.75A per conductor

Part No.	Product No.	Conductors	Description	1	5	10
447890CG	9536-060-500	6	500' unreel	\$179.19	\$169.99	\$160.05

Unshielded Audio, Control and Instrumentation Cable

18 AWG stranded (19 x 30) tinned copper

- Insulation & outer jacket: PVC
- Color: Chrome
- Nominal capacitance: 26pF/ft.
- Max. operating voltage: 300Vrms
- Nominal DCR: 6.3Ω/1000'
- Max. current: 4A per conductor

Part No.	Product No.	Conductors	Description	1	5	10
447566CG	8489-060-U1000	4	1000' unreel	\$480.19	\$400.50	\$385.85

Audio, Control and Instrumentation Cable

18 AWG stranded (19 x 30) tinned copper with 20 AWG stranded TC drain wire

- Insulation: S-R PVC (semi-rigid PVC)
- Outer shield: Beldfoil® (Z-Fold®) aluminum foil-polyester tape 100% coverage
- Color: chrome
- Outer jacket: PVC
- Nominal capacitance: 70pF/ft.
- Max. operating voltage: 300Vrms
- UL1685 FT4 flame test
- Nominal DCR: 6.5Ω/1000'
- Max. current: 5A per conductor

Part No.	Product No.	Conductors	Description	1	5	10
447865CG	9418-060-500	4	500' reel	\$257.09	\$243.51	\$231.35

New Generation® Commercial Application Cable

18 AWG stranded (7 x 26) bare copper with 20 AWG stranded (7 x 28) TC drain wire

- Insulation: PVC 0.010" diameter
- Color: gray
- Outer jacket: PVC
- UL1666 vertical shaft flame test
- Outer shield: Beldfoil® aluminum foil – polyester tape w/ shorting fold 100% coverage
- Nominal capacitance: 38pF/ft.
- Max. operating voltage: 300Vrms
- Nominal DCR: 7.2Ω/1000'
- Max. current: 4A per conductor

Part No.	Product No.	Conductors	Description	1	5	10
447401CG	5302FE-008-U1000	4	1000' unreel	\$176.75	\$167.89	\$144.10

▲ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

Ⓜ RoHS compliant product Ⓞ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. [Details on page 1.](#)



Belden Multi-Conductor Cables (Cont'd)

Multi-Conductor Audio, Control & Instrumentation Cables Non-Plenum

22 AWG stranded (7 x 30) shielded with 22 AWG stranded TC drain wire

- Polyethylene insulation
- Nominal capacitance: 75pF/m
- Nominal outer diameter: 0.199"
- Color: chrome



Part No.	Product No.	Conductors	Description	1	5	10
733235CG	8771-100-60	3	100' reel	\$29.99	\$25.95	\$24.65
733243CG	8771-500-60	3	500' reel	130.05	127.50	124.95
733252CG	8771-1000-60	3	1000' reel	228.15	215.17	202.52
734068CG	8771-U500-60	3	500' unreel box	149.99	142.31	134.39
734067CG	8771-U1000-60	3	1000' unreel box	298.95	281.99	265.41

22 AWG stranded (7 x 30) unshielded

- PVC insulation
- Color: chrome



Part No.	Product No.	Conductors	Description	1	5	10
732996CG	8442-100-60	2	100' reel	\$11.99	\$10.99	\$9.99
733008CG	8442-500-60	2	500' reel	51.59	48.91	46.19
733016CG	8442-1000-60	2	1000' reel	139.39	133.48	123.82
734055CG	8442-U500-60	2	500' unreel box	70.39	66.71	62.99
734054CG	8442-U1000-60	2	1000' unreel box	96.45	92.38	85.69
733024CG	8443-100-60	3	100' reel	15.69	14.25	12.94
733032CG	8443-500-60	3	500' reel	72.75	68.91	65.09
733041CG	8443-1000-60	3	1000' reel	189.95	179.95	169.95
734057CG	8443-U500-60	3	500' unreel box	72.75	68.91	65.09
734056CG	8443-U1000-60	3	1000' unreel box	137.79	130.17	120.75
733059CG	8444-100-60	4	100' reel	25.39	23.09	20.98
733067CG	8444-500-60	4	500' reel	92.99	88.07	83.19
733075CG	8444-1000-60	4	1000' reel	176.19	166.35	154.31
734059CG	8444-U500-60	4	500' unreel box	142.55	129.18	116.26
734058CG	8444-U1000-60	4	1000' unreel box	176.19	166.35	154.31
733083CG	8445-100-60	5	100' reel	25.15	22.76	20.69
733092CG	8445-500-60	5	500' reel	111.99	101.80	93.33
733104CG	8445-1000-60	5	1000' reel	220.25	207.99	192.96
734061CG	8445-U500-60	5	500' unreel box	190.49	173.14	158.74
734060CG	8445-U1000-60	5	1000' unreel box	374.65	353.75	328.19

20 AWG stranded (7 x 28) shielded with 20 AWG stranded TC drain wire

- Polyethylene insulation and chrome PVC jacket
- Nominal capacitance: 89pF/m
- Nominal outer diameter: 0.218"
- Color: chrome



Part No.	Product No.	Conductors	Description	1	5	10
734254CG	8772-U500-60	3	500' unreel box	\$149.99	\$136.36	\$124.99
734253CG	8772-U1000-60	3	1000' unreel box	306.45	280.92	259.29

18 AWG stranded (16 x 30) shielded with 20 AWG stranded TC drain wire

- Polyethylene insulation
- Nominal capacitance: 79pF/m
- Nominal outer diameter: 0.246"
- Color: chrome



Part No.	Product No.	Conductors	Description	1	5	10
733201CG	8770-100-60	3	100' reel	\$59.99	\$54.99	\$49.99
733219CG	8770-500-60	3	500' reel	210.09	190.59	173.18
733227CG	8770-1000-60	3	1000' reel	403.29	371.15	342.58
734084CG	8770-U500-60	3	500' unreel box	274.49	249.03	226.26
734083CG	8770-U1000-60	3	1000' unreel box	497.09	457.48	422.27

We're Listening to What You Need


Our goal is to provide you with more of what you want. Let us know how we can better serve your electronics needs. Please send your requests to NewProducts@Jameco.com.

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

Wire & Cable

568641CG: Multi-Conductor Unshielded Communications & Control Cable

- 22 AWG (7 x 30) stranded tinned copper
- UL AWM 2576 type CM
- PVC jacket • Gray • 2 conductor



568691CG: Multi-Conductor Foil Shield Communication & Control

- 20 AWG (7 x 28) stranded tinned copper with 20 AWG (10 x 30) stranded drain wire tinned copper
- Rating: 300V; 75°C • 2 conductor
- PE insulation • PVC jacket (gray)



568827CG: Xtra Guard® I Multi-Conductor, Unshielded Cable

- 24/20/18/16 AWG stranded tinned copper
- UL type CM, AWM 2464 • PVC jacket
- Rating: 300V; -20°C to 80°C



568747CG: 0.050" Centers Flat Ribbon Cable

- Rating: 300V; -20°C to 105°C • PVC insulation
- Nominal capacitance: 14pF/ft. • 9 conductors
- Nominal impedance: 105Ω • Stranded tinned

- UL style 2651
- Gray



Part No.	Product No.	Description	1	10	100
568641CG	1172C SL005	100' reel			
568691CG	2411C SL002	500' reel			
568827CG	5062C SL005	100' reel			
568747CG	3580/9 SL005	100' reel			


Because of price volatility, get current pricing by entering part number at www.Jameco.com

See Our Alpha Wire & Cable Offering at www.Jameco.com/Prod/AlphaWire

Hook-Up Wire

568721CG: Type B MIL-W-16878E

- 600V • PVC insulation • Green
- Operating temp: -20°C to 105°C
- 10 AWG (105 x 30) stranded



568886CG: Type EE UL Style 1880 MIL-W-16878E

- 18 AWG (19 x 30) stranded • Yellow
- TFE Teflon insulation • Rating: 1000V; 200°C



568659CG/568667CG: Type MW MIL-W-76B

- PVC insulation • Rating: 1000V; 80°C • Yellow
- 18 AWG (16 x 30) and 12 AWG (65 x 30) stranded tinned copper

568704CG: Type E MIL-W-16878E

- 22AWG Solid • Color: orange
- Teflon (PTFE) insulation • Voltage rating: 600Vrms

568712CG: AWM / Style1015

- 14AWG stranded (41 x 30) tinned copper • PVC insulation
- Voltage rating: 600Vrms • Color: red

568923CG: AWM / Style1430

- 18AWG stranded (7 x 26) tinned copper • PVC insulation
- Voltage rating: 300Vrms • Color: green

Part No.	Product No.	Description	1	5	10
568721CG	3081 GR005	100' reel			
568886CG	5877 BK005	100' reel			
568659CG	1555 GR005	100' reel			
568667CG	1560 GR005	100' reel			
568704CG	2855/1 OR001	100' reel			
568712CG	3079-RD001	100' reel			
568923CG	7133-GR001	100' reel			

Because of price volatility, get current pricing by entering part number at www.Jameco.com

See Our Alpha Wire & Cable Offering at www.Jameco.com/Prod/AlphaHookupWire

Shielding Grounding Strap

A tight weave of multi-strand, soft drawn tinned copper wire, this shielding ground strap is an ideal material for short run cables providing easy radial termination.

- Applications: point-to-point ground path, wire/cable shielding
- Nominal ID – 11/64" (4.37mm); braid construction – 36AWG individual ends 168 individual ends; 14 AWG equivalence



Part No.	Product No.	Length	1	10	100
568675CG	2168-SV003	250 ft. tinned copper braid	\$181.95	\$172.86	\$164.22

▲ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

RoHS compliant product This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. [Details on page 1.](#)

Solid Hook-Up Wire – 22 AWG

- Temp. range: -55°C to +105°C • Passes UL VW-1 flame test
- Weight: 100' (0.3 lbs.); 1000' (3.8 lbs.) • MIL-W-16878D type B
- For use with breadboards such as the JE20 series, pg 331



Part No.	Cross Ref. No.	Color	100 ft.	Part No.	Cross Ref. No.	Color	1000 ft.
36768CG	122BE/C	Blue	\$5.49	36776CG	122BE/K	Blue	\$39.99
36792CG	122BK-R/C	Black	5.49	36805CG	122BK/K	Black	39.99
36822CG	122G-R/C	Green	5.49	36840CG	122G/K	Green	39.99
36856CG	122R/C	Red	5.49	36864CG	122R/K	Red	39.99
36881CG	122W-R/C	White	5.49	36899CG	122W/K	White	39.99
36920CG	122Y/C	Yellow	5.49	36928CG	122Y/K	Yellow	39.99

UL 1430 Stranded Hook-up Wire

- Temperature rating: 105°C • Voltage: 300V
- Average wall thickness: 0.016 • 18/20 AWG
- Sold in 100' rolls



Part No.	Gauge	Color	Strands	Dia. (in.)	Dia. (mm)	1	10	25
307918CG	18	Black	19 x 30	0.082	2.083	\$19.95	\$17.95	\$16.15
307926CG	18	Red	19 x 30	0.082	2.083	19.95	17.75	16.15
305015CG	18	Orange	7 x 26	0.082	2.083	19.95	17.95	16.15
305023CG	18	Yellow	7 x 26	0.082	2.083	19.95	17.95	16.15
304995CG	20	Yellow	19 x 32	0.071	1.803	19.95	17.95	16.15
305007CG	20	Gray	19 x 32	0.071	1.803	19.95	17.95	16.15
304979CG	20	Blue	7 x 28	0.070	1.778	19.95	17.95	16.15
304987CG	20	Gray	7 x 28	0.070	1.778	19.95	17.95	16.15
307897CG	20	Black	7 x 28	0.070	1.778	19.95	17.95	16.15
307900CG	20	Red	7 x 28	0.070	1.778	19.95	17.95	16.15

UL 1007 Stranded Hook-Up Wire

300 Volts

- 80°C • PVC insulation
- Temperature range: -40°C to +80°C
- CSA: TR-64 • Sold in 100' rolls



Part No.	Cross Ref.	AWG	Color	Wt. (lbs.)	1	5	10
126084CG	223SBK/C	22 (7x30)	Black	0.4	\$3.39	\$3.19	\$2.99
126033CG	223SR/C	22 (7x30)	Red	0.4	3.39	3.19	2.99
126076CG	223SW/C	22 (7x30)	White	0.4	3.39	3.19	2.99
310851CG	UL1007-22-GR-C	22 (7x30)	Green	1.0	4.05	3.83	3.59
310877CG	UL1007-22-YL-C	22 (7x30)	Yellow	1.0	3.39	3.19	2.99
310885CG	UL1007-22-BL-C	22 (7x30)	Blue	1.0	3.39	3.19	2.99
125840CG	203SBK/C	20 (10x30)	Black	0.6	4.95	4.75	4.49
125794CG	203SR/C	20 (10x30)	Red	0.5	5.95	5.70	5.39
125831CG	203SW/C	20 (10x30)	White	0.5	5.95	5.70	5.39
310893CG	UL1007-20-GR-C	20 (10x30)	Green	1.0	5.95	5.70	5.39
310915CG	UL1007-20-YL-C	20 (10x30)	Yellow	1.0	4.95	4.75	4.49
310922CG	UL1007-20-BL-C	20 (10x30)	Blue	1.0	5.95	5.70	5.39
125786CG	183SBK/C	18 (16x30)	Black	0.8	5.79	5.55	5.25
125735CG	183SR/C	18 (16x30)	Red	0.8	5.79	5.55	5.25
125751CG	183SW/C	18 (16x30)	White	0.8	5.79	5.55	5.25
310931CG	UL1007-18-GR-C	18 (16x30)	Green	1.0	6.95	6.66	6.30
310949CG	UL1007-18-YL-C	18 (16x30)	Yellow	1.0	6.95	6.66	6.30
310958CG	UL1007-18-BL-C	18 (16x30)	Blue	1.0	5.79	5.55	5.25

Twisted Pair Cable – 24 AWG

- PVC insulation • Reduced EMI
- Use for hook up wire • 80°C
- Stranded tinned wire (7 x 32) • 300 V
- Weight: 100' (0.5 lbs.); 1000' (4.7 lbs.)



Part No.	Cross Ref. No.	Color	100 ft.	Part No.	Cross Ref. No.	Color	1000 ft.
105911CG	224GW/C	Green/white	\$5.99	105806CG	224GW/K	Green/white	\$44.99
173147CG	224RW/C	Red/white	5.99	173155CG	224RW/K	Red/white	44.99
173163CG	224BW/C	Black/white	5.99	173171CG	224BW/K	Black/white	44.99



RoHS Compliant Product
RoHS Also Available

Details on Page 1

Color Code Legend
New Sale Lower\$ QtySave

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

Call for OEM pricing

JAMECO ValuePro Modular Telephone Cable – 28 AWG

- Color coded conductors
- Flat modular cable
- PVC jacket
- 7 x 43 stranded
- Gray

A Jameco EXCLUSIVE

Part No.	Cross Ref. No.	Conductors	Length (ft.)	1	25	50
644666CG	300-840SL-100	4	100	\$3.49	\$3.29	\$3.09
644674CG	300-840SL-1000	4	1000	29.99	28.49	27.05
644691CG	300-860SL-100	6	100	7.49	6.75	6.09
644703CG	300-860SL-1000	6	1000	49.99	47.49	45.09
644720CG	300-880SL-100	8	100	9.99	9.49	8.99
644738CG	300-880SL-1000	8	1000	61.99	58.89	55.95

JAMECO ValuePro Category 5e/5 Network Cable

- 4 twisted pairs
- Insulation: polyethylene
- Nom. OD.: 0.189"
- Nom. impedance: 100
- UTP

A Jameco EXCLUSIVE

Solid: uses modular plug P/N 119343CG, pg 115
Stranded: uses modular plug P/N 79281CG, pg 115

- Prepackaged and priced in increments of 25', 100' or 1000'

24 AWG UTP Category 5 Enhanced – 350MHz

Part No.	Cross Ref. No.	Description	Color	Length (ft.)	1	25
644543CG	10X5-701TH-25	Solid	Gray	25	\$4.99	\$4.75
644551CG	10X5-701TH-100	Solid	Gray	100	16.99	16.15
644560CG	10X5-701TH-1000	Solid	Gray	1000	99.99	94.99
645714CG	10X5-704TH-25	Solid	Blue	25	4.99	4.75
645722CG	10X5-704TH-100	Solid	Blue	100	16.99	16.15
645731CG	10X5-704TH-1000	Solid	Blue	1000	99.99	94.99
644578CG	10X5-801TH-25	Stranded	Gray	25	5.99	5.69
644586CG	10X5-801TH-100	Stranded	Gray	100	17.99	16.19
644594CG	10X5-801TH-1000	Stranded	Gray	1000	159.99	143.99
644607CG	10X5-804TH-25	Stranded	Blue	25	5.99	5.69
644615CG	10X5-804TH-100	Stranded	Blue	100	17.99	16.19
644623CG	10X5-804TH-1000	Stranded	Blue	1000	159.99	151.99
645749CG	10X5-805TH-25	Stranded	Red	25	5.99	5.69
645757CG	10X5-805TH-100	Stranded	Red	100	17.99	16.19
645765CG	10X5-805TH-1000	Stranded	Red	1000	159.99	143.99
645773CG	10X5-802TH-25	Stranded	Black	25	5.99	5.69
645781CG	10X5-802TH-100	Stranded	black	100	17.99	16.19
645790CG	10X5-802TH-1000	Stranded	Black	1000	159.99	143.99
645802CG	10X5-806TH-25	Stranded	Yellow	25	5.99	5.69
645811CG	10X5-806TH-100	Stranded	Yellow	100	17.99	16.19
645829CG	10X5-806TH-1000	Stranded	Yellow	1000	159.99	143.99

24 AWG UTP Category 5 – 100MHz

• 7/32 AWG

Part No.	Cross Ref. No.	Description	Color	Length (ft.)	1	25
644631CG	GTP501-4P-GR-25	Stranded	Gray	25	\$5.95	\$5.65
644640CG	GTP501-4P-GR-100	Stranded	Gray	100	19.35	18.39
644658CG	GTP501-4P-GR-1000	Stranded	Gray	1000	164.49	156.25

Kynar™ Wire Wrap Wire – 30 AWG

- Assorted color coded insulation
- Color coded Kynar™ (Polyvinidene Fluoride) insulation
- Silver plated copper (solid conductor)
- Temperature: -40°C to +125°C
- Wire wrap tools, pg 312
- See pg 155 for sockets
- Used for prototyping
- UL 1423
- Passes UL VW-1 flame test

A Jameco EXCLUSIVE

22542CG

Part No.	Color	Wt. (lbs.)	100 ft.	Part No.	Color	Wt. (lbs.)	1000 ft.
22542CG	Blue	0.1	\$4.99	22551CG	Blue	0.6	\$29.95
22577CG	Black	0.1	4.95	22585CG	Black	0.6	29.95
22631CG	Red	0.1	4.95	22649CG	Red	0.6	29.95
22665CG	White	0.1	4.95	22673CG	White	0.6	29.95
22606CG	Green	0.1	4.95	22614CG	Green	0.6	29.95
22700CG	Yellow	0.1	4.95	22702CG	Yellow	0.6	29.95

JAMECO ValuePro Multiconductor Shielded Computer Communication Cable – 24 AWG

- Stranded copper wire, multi-colored insulation
- Insulated with polyvinyl chloride (PVC)
- Voltage rating: 300V
- 24 AWG (7 x 32 AWG)
- Shielded 100% w/ aluminum mylar
- Prepackaged and priced in increments listed below
- Color: gray
- Drain wire

A Jameco EXCLUSIVE

Part No.	Cross Ref. No.	Conductors	Diameter	Length	1	25
644383CG	SC4-25	4	0.20"	25'	\$4.75	\$4.49
644391CG	SC4-100	4	0.20"	100'	16.99	16.15
644404CG	SC4-1000	4	0.20"	1000'	139.99	132.99
644412CG	SC9-25	9	0.23"	25'	11.25	10.69
644421CG	SC9-100	9	0.23"	100'	34.99	33.25
644439CG	SC9-1000	9	0.23"	1000'	269.99	256.49
644447CG	SC15-25	15	0.28"	25'	14.75	13.99
644455CG	SC15-100	15	0.28"	100'	48.99	46.55
644463CG	SC15-1000	15	0.28"	1000'	429.99	408.49
644471CG	SC25-25	25	0.37"	25'	22.25	21.15
644480CG	SC25-100	25	0.37"	100'	70.99	67.45
644498CG	SC25-500	25	0.37"	500'	589.99	560.49

JAMECO ValuePro Multicolor Flat Ribbon Cable – 28 AWG

- Standard 10-color repeat sequence
- 28 AWG (7 x 36)
- Stranded copper wire
- Center spacing: 0.05"
- Voltage rating: 300V
- Temperature rating: -20°C to +80°C
- Prepackaged and priced in increments listed below

A Jameco EXCLUSIVE

Part No.	Cross Ref. No.	Conductors	Length	1	25	50
639672CG	28RC10-10	10	10'	\$1.99	\$1.95	\$1.89
643508CG	28RC10-25	10	25'	8.39	7.56	6.80
643516CG	28RC10-100	10	100' reel	19.99	19.49	18.99
643532CG	28RC16-10	16	10'	3.49	3.29	3.09
643541CG	28RC16-25	16	25'	13.45	12.08	10.88
643559CG	28RC16-100	16	100' reel	52.19	46.95	42.26
643575CG	28RC20-10	20	10'	4.99	4.75	4.49
643583CG	28RC20-25	20	25'	16.79	15.11	13.60
643591CG	28RC20-100	20	100' reel	65.25	58.70	52.83
643612CG	28RC25-10	25	10'	6.99	6.65	6.29
643621CG	28RC25-25	25	25'	15.99	15.19	14.45
643639CG	28RC25-100	25	100' reel	59.99	56.99	54.15
643655CG	28RC34-10	34	10'	7.99	7.59	7.19
643663CG	28RC34-25	34	25'	17.99	16.99	16.15
643671CG	28RC34-100	34	100' reel	69.99	66.99	64.15
643698CG	28RC40-10	40	10'	8.99	8.55	8.09
643701CG	28RC40-25	40	25'	33.59	30.22	27.20
643719CG	28RC40-100	40	100' reel	79.99	75.99	72.19
643735CG	28RC50-10	50	10'	10.99	10.45	9.95
643743CG	28RC50-25	50	25'	41.95	37.75	33.98
643751CG	28RC50-100	50	100' reel	163.15	146.75	132.11

JAMECO ValuePro 2-Conductor Power/Speaker Cable – 24 AWG

- Black wire with white polarity stripe
- Temperature rating: 20°C to 60°C
- Stranded copper wire (7 x 32)
- Operating voltage: 300V
- Blue Part No. = Limited Quantity Available

A Jameco EXCLUSIVE

Part No.	Cross Ref. No.	Length	Wt. (lbs.)	1	10	25
100280CG	224BK/C	100'	0.8	\$5.59	\$4.99	\$4.49
100298CG	224BK/K	1000'	7.8	44.99	40.49	36.45

Belden Flat Ribbon Cables

see inside back cover

NEW

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

Call for OEM pricing

JAMECO ValuePro Gray Flat Ribbon Cable – 28 AWG


- Single edge red stripe for pin 1 orientation
- Insulation: polyvinyl chloride (PVC)
- Center spacing: 0.05"
- Temp. rating: -20°C to +80°C
- 28 AWG (7 x 36)
- Voltage rating: 300V
- Stranded copper wire
- Prepackaged and priced in increments listed below



Part No.	Cross Ref. No.	Conductors	Length	1	25	50
643794CG	171-10-10R	10	10'	\$1.49	\$1.39	\$1.29
643807CG	171-10-25R	10	25'	3.19	3.09	2.99
643815CG	171-10-100R	10	100' reel	11.49	10.99	10.49
643831CG	171-16-10R	16	10'	2.19	2.09	1.99
643840CG	171-16-25R	16	25'	4.99	4.49	3.99
643858CG	171-16-100R	16	100' reel	15.99	14.99	13.99
643874CG	171-20-10R	20	10'	3.99	3.79	3.59
643882CG	171-20-25R	20	25'	6.25	5.99	5.69
643891CG	171-20-100R	20	100' reel	29.25	26.31	23.68
643911CG	171-25-10R	25	10'	3.89	3.79	3.69
643920CG	171-25-25R	25	25'	8.75	8.29	7.85
643938CG	171-25-100R	25	100' reel	24.99	23.75	22.55
643962CG	171-26-10R	26	10'	3.49	3.29	3.09
643971CG	171-26-25R	26	25'	7.99	7.59	7.19
643989CG	171-26-100R	26	100' reel	24.99	23.69	22.49
644033CG	171-34-10R	34	10'	4.25	3.99	3.79
644041CG	171-34-25R	34	25'	9.25	8.79	8.35
644050CG	171-34-100R	34	100' reel	31.99	30.39	28.85
644076CG	171-37-10R	37	10'	5.89	5.59	5.29
644084CG	171-37-25R	37	25'	11.75	11.15	10.59
644092CG	171-37-100R	37	100' reel	34.99	33.25	31.59
644113CG	171-40-10R	40	10'	7.39	6.99	6.65
644121CG	171-40-25R	40	25'	17.49	16.59	15.75
644130CG	171-40-100R	40	100' reel	47.99	45.59	43.29
644156CG	171-50-10R	50	10'	6.75	6.39	6.05
644164CG	171-50-25R	50	25'	14.49	13.75	13.05
644172CG	171-50-100R	50	100' reel	48.99	46.55	44.19
644199CG	171-60-10R	60	10'	8.95	8.49	8.05
644201CG	171-60-25R	60	25'	19.75	18.75	17.79
644210CG	171-60-100R	60	100' reel	64.99	61.75	58.65

.100" (2.54mm) Flat Ribbon Cable

- 10-conductor 24 AWG stranded
- Insulation material: 7mm polyvinyl chloride (PVC) gray
- Rated temp.: 105°C
- Rated voltage: 300V
- Dielectric strength: 2kV in 1 min.
- Insulation resistance: 100MΩ
- Capacitance: 31pF/m
- Inductance: 1.45µH/m



Part No.	Cross Ref.	Length	1	10	25
363813CG	H24G-10-10	10'	\$8.99	\$8.49	\$7.99
363821CG	H24G-10-25	25'	19.99	18.99	17.99
363856CG	H24G-10-100	100'	69.99	64.99	59.99
363864CG	H24G-10-250	250' reel	199.99	174.99	149.99

Save Big! Special Values!

Sale Priced Items = Yellow
Exceptional Quantity Discounts = Green

JAMECO ValuePro RG Type Bulk Coaxial Cable

- RG58/U & RG58A/U (50Ω): Nom. cap.: 27pF/ft.; center resist.: 10.4Ω/1000ft. @ 77°F
- For ethernet, oscilloscopes
- RG59/U (75Ω): Nominal capacitance: 19pF/ft.; center resist.: 16.5Ω/1000ft. @ 77°F
- For CATV & video patch cords
- RG174/U (50Ω): Nominal capacitance: 30.8pF/ft.; center resist.: 97Ω/1000ft. @ 77°F
- For ethernet, oscilloscopes



Part No.	Cross Ref No.	Type	Description	Length	1	25	50
644754CG	RG58/U-100	RG58/U	20 AWG solid	100'	\$11.99	\$11.39	\$10.79
644762CG	RG58/U-1000	RG58/U	20 AWG solid	1000'	108.49	103.05	97.89
644771CG	10X1-041TH-100	RG58A/U	20 AWG stranded	100'	18.99	17.99	17.09
644789CG	10X1-041TH-1000	RG58A/U	20 AWG stranded	1000'	149.99	142.49	135.35
644797CG	RG59/U-100	RG59/U	22 AWG solid	100'	12.99	12.35	11.75
644800CG	RG59/U-1000	RG59/U	22 AWG solid	1000'	109.99	104.49	99.25
644818CG	RG174/U-100	RG174/U	26 AWG stranded	100'	18.99	17.99	17.09
644826CG	RG174/U-1000	RG174/U	26 AWG stranded	1000'	168.99	160.55	152.49

Quantity SAVE

Disk Drive Cables



185084CG



185076CG



72805CG

Part No.	Description	Length	1	10	100
185084CG	34-pin header socket ribbon cable for floppy drive	25'	\$1.19	\$0.99	\$0.75
32918CG	34-pin header socket ribbon cable for floppy to card	23' ...	3.49	2.97	2.22
355637CG	40-pin IDE hard drive cable to card	11.5'89	.86	.83
185076CG	40-pin IDE hard drive cable to card	14'95	.71	.53
32686CG	40-pin IDE hard drive cable to card	18'95	.90	.85
72805CG	Two 40-pin header socket ribbon cable for IDE drive	18' ...	3.69	3.14	2.35
175492CG	40-pin header socket ribbon cable for ultra DMA66/100	17' ...	6.95	6.25	5.49

Internal & External SCSI Cables for Complete Connectivity



32715CG



137550CG



118076CG

- For PC/XT/AT and compatibles
- All lines connected

Part No.	Description	1	10	100
32715CG	50-pin header socket ribbon cable SCSI-I (18")	\$3.95	\$3.49	\$2.95
137550CG	68-pin header internal ribbon cable SCSI-III (27")	12.49	11.25	10.15
118076CG	Male HPDB50 to male HPDB50 SCSI-II to SCSI-II (6")	17.95	15.95	13.95

JAMECO ValuePro Internal Serial ATA, ATA-133 & Floppy Drive Cables



348710CG



348795CG




348841CG



Part No.	Description	Length	1	10	25
348710CG	Round Serial ATA cable, 90°, red, 7-pin	19.9"	\$4.19	\$3.70	\$3.52
348744CG	Round Serial ATA cable, 90°, red, 7-pin	39.4"	5.29	4.69	4.45
348728CG	Round Serial ATA cable, 180°, red, 7-pin	19.9"	4.19	3.70	3.52
348736CG	Round Serial ATA cable, 180°, red, 7-pin	39.4"	5.29	4.69	4.45
348752CG	Round ATA-133/IDE cable, dual 40-pin, blue	18"	4.25	3.84	3.65
348761CG	Round ATA-133/IDE cable, dual 40-pin, black	18"	4.25	3.84	3.65
348779CG	Round ATA-133/IDE cable, dual 40-pin, blue	24"	4.89	4.60	4.38
348787CG	Round ATA-133/IDE cable, dual 40-pin, black	24"	4.89	4.60	4.38
348795CG	Round floppy drive cable, 34-pin, blue	18"	5.95	5.95	5.19
348808CG	Round floppy drive cable, 34-pin, black	18"	5.95	5.46	5.19
348816CG	Round floppy drive cable, 34-pin, blue	24"	6.89	6.49	6.17
348841CG	Serial ATA power cable ext., 15-pin to 4-pin	6"	2.49	2.30	2.19

3.5" Disk Drive Power Adapter Cable


- IBM PC/XT and higher compatibles
- Allows connection of standard 3.5" disk drives to power supplies



Part No.	Length	AWG	1	10	100
28396CG	3.5'	22	\$2.49	\$2.25	\$1.95

3.5" & 5.25" Disk Drive Power Splitters

- IBM PC/XT and higher compatibles
- Splits 4-line Molex male into 2 females



Blue Part No. = Limited Quantity Available

Part No.	Drive	AWG	Length	1	10	100
28353CG	5.25"	18	5'	\$2.95	\$2.69	\$2.39
277528CG	5.25"	20	6'	2.85	2.59	2.25
72303CG	3.5"	22	5'	2.75	2.49	2.19

AT/ATX Power Supply Extension Cables

- 348891CG: For use with 12-pin AT power supplies
- 326490CG/170237CG: For use with ATX power supplies
- 20-pin ATX male and female connectors
- Color coded to ATX power supply




Blue Part No. = Limited Quantity Available

Part No.	Length	AWG	1	10	100
348891CG	9.75'	18	\$1.89	\$1.78	\$1.69
170237CG	15'	18	5.95	5.65	5.35

Ribbon Cable Assemblies

- Metal connector
- 300V rating
- 105°C rating
- 28 AWG flat cable
- Tin-plated contacts



Part No.	Description	1	10	100
12407CG	4' DB25 M-F	\$4.49	\$3.95	\$3.59
208582CG	6' DB9 M-F	3.95	3.55	3.19

PC/XT/AT & PS/2 Keyboard Extension Cables

- Color: beige
- 114981CG/112045CG: 5-pin DIN male-to-female
- 28548CG/111053CG: 6-pin mini DIN female-to-male



Part No.	Description	1	10	100
114981CG	PC/XT/AT 6' non-coiled	\$1.99	\$1.69	\$1.27
112045CG	PC/XT/AT 10' non-coiled	3.95	3.36	2.52
28548CG	PS/2 6' non-coiled	4.35	3.89	3.49
111053CG	PS/2 10' non-coiled	5.49	4.99	4.39

Dual PS/2 Adapter

- Converts a dual PS/2 female to a single PS/2 male.
- Size: 1.9"L x 1.2"W



Part No.	Description	1	10	100
319791CG	PS/2 adapter	\$2.75	\$2.59	\$2.45

AT-to-PS/2 and PS/2-to-AT Keyboard Adapter Cables

- 28003CG/319783CG: Connects AT-type keyboards to PS/2
- 5-pin female DIN to 6-pin male mini DIN



310789CG: Connects PS/2 keyboard to AT

- 6-pin female mini DIN to 5-pin male DIN connectors

Part No.	Length	Color	1	10	100
319783CG	4.5'	Black	\$2.45	\$2.19	\$1.99
28003CG	6.5'	Beige	3.95	3.49	3.15
310789CG	7.5'	Beige	3.95	3.49	3.15

IEEE 1284 Parallel/ Serial High Speed Cables

Compatible with bidirectional communication data flow resulting in speeds up to 10 times faster than conventional applications.


- Double shielded with 28 AWG stranded twisted pair inner conductors
- Molded shells, PVC plastic
- Color: beige (P/N 130067CG/319767CG); black (P/N 161630CG); gray (P/N 223845CG)



Part No.	Description	1	10
130067CG	6' DB25 M-Cent. parallel 36M	\$11.95	\$10.95
319767CG	6' DB25 M-Cent. parallel 36M	4.95	4.69
223845CG	6' DB25 M-Cent. parallel 36M	11.95	10.95
161630CG	10' DB25 M-M serial cable	14.95	13.49

IEEE 488 Cables

A variety of cable lengths are offered to ensure that IEEE system requirements are met (20 meters maximum length with a maximum of 15 devices). These cables are standard IEEE 488 with stackable 24-pin GPIB connectors on both ends.



Part No.	Description	Wt. (lbs.)	1	10	25
73154CG	1 meter	0.8	\$36.49	\$32.79	\$29.49
115781CG	2 meter	1.2	37.95	34.19	30.95
115801CG	4 meter	2.0	38.95	36.19	31.95

Serial Null Modem Cables

- Molded type connectors
- Color: gray
- 181403CG/180697CG Pin outs: 1 & 6-4, 2-3, 3-2, 4-6 & 1, 5-5, 7-8, 8-7
- 181438CG Pin outs: 2-2; 3-3; 5 & 6-4; 7-5; 8-7; 20-6 & 8 (Serial printer null modem)
- 180582CG Pin outs: 2-2; 3-3; 4-5 & 6; 5-7; 6 & 8-20; 7-8; (Serial printer null modem)
- 180742CG Pin outs: 1-4 & 5; 2-2; 3-3; 4-6; 5-7; 6-20; 7-8; 8-8



Part No.	Description	Wt. (lbs.)	1	10	50
181403CG	6' DB9 F to DB9 F	0.3	\$5.69	\$5.09	\$4.59
180697CG	10' DB9 F to DB9 F	0.4	6.79	6.09	5.49
181438CG	6' DB25 M to DB9 F	0.4	4.95	4.49	3.95
180582CG	10' DB25 M to DB9 F	0.4	6.69	6.05	5.45
180742CG	10' DB25 F to DB9 F	0.5	7.39	6.65	5.99

RGB Video Cables

- 75Ω coaxial cable; 6' or 10'
- Pin 1 red, pin 2 green, pin 3 blue, pin 14 white/black vertical, pin 13 gray horizontal
- 5 BNCs to HDDB15-pin male
- Weight: 0.9 lbs.



Part No.	Description	1	10	25
73648CG	6' cable (black)	\$19.95	\$16.99	\$12.75
118068CG	10' cable (black)	23.35	19.85	14.89

VGA Monitor Cables

- Connects video card to VGA monitor
- IBM PC/XT and higher compatibles
- HDDB15 male to male



Part No.	Description	1	10	100
66173CG	6' monitor cable	\$6.49	\$5.89	\$5.29
148523CG	10' monitor cable	6.95	6.25	5.59

9-Pin Monitor Cable

- For monochrome, RGB, EGA and multisync monitors
- Connects video card to monitor
- IBM PC/XT and higher compatibles



Part No.	Description	1	10	100
66157CG	6' DB9 M-M	\$4.45	\$3.95	\$3.55

VGA Monitor Extension Cables

- Extends VGA monitor cable; HDDB15 male-to-female
- IBM PC/XT and higher compatibles
- 134041CG: HDDB15 female w/ hex nuts and HDDB15 male w/ thumbscrews
- 66165CG/148531CG: Thumbscrews on each end



Part No.	Description	1	10	100
134041CG	6' screws/hex nuts	\$4.49	\$3.95	\$3.49
66165CG	6' thumbscrews	6.59	5.95	5.35
148531CG	10' thumbscrews	7.49	6.79	5.99

DA15 Extension Cables

- Molded connectors
- Straight through
- Thumbscrews
- Color: gray (237032CG: black)



Part No.	Description	Length	1	10	100
181286CG	DA15 M-M	6'	\$5.49	\$4.95	\$4.45
181358CG	DA15 M-F	6'	5.49	4.95	4.45
237032CG	DA15 M-F	8'	6.99	5.95	4.45

Macintosh® Printer Cables

Part No.	Description	1	10	50
10604CG	6' mini DIN8M	\$3.29	\$3.15	\$2.99
130024CG	10' mini DIN8M	5.99	5.39	4.85

Over 99% of Our Catalog Products Are In Stock

Place your order by 6PM EST for same business-day shipment.

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

DB25-to-Centronics Parallel Printer Cables




- Molded and fully shielded DB25 male and 36-pin Centronics male connectors
- IBM PC/XT and higher compatibles

Part No.	Description	Wt. (lbs.)	1	10	100
28716CG	6' straight	0.4 ...	\$3.95	\$3.56	\$3.20
223845CG	6' straight†	0.6 ...	11.95	10.95	9.75
123781CG	10' straight⊕	0.6 ...	5.95	5.09	3.79
164777CG	10' rt. angle*	0.7 ...	4.95	4.45	3.95
28708CG	15' straight⊕	0.8 ...	5.95	5.09	3.79
101899CG	25' straight⊕	1.1 ...	5.95	5.06	3.79

† IEE 1284 * Centronics right angle

37-Pin Straight Through Cable Adapters



- Molded connectors • Color: gray • Weight: 0.9 lbs.

Part No.	Description	1	10	100
180611CG	6' DC37 M-M⊕	\$6.95	\$6.29	\$5.65
181294CG	6' DC37 M-F⊕	5.95	5.49	4.95

Monitor/Mouse/Keyboard Cables

- 6' or 32'
- HDDB15 male/female for monitor, 5-pin DIN male/female for keyboard, and DB9 male/female for mouse



Part No.	Description	Wt. (lbs.)	1	10
141284CG	6' cable⊕	1.6	\$22.95	\$19.95
141276CG	32' cable⊕	4.8	39.95	35.95

Switch Box Adapter Cables

- 177261CG: Male to male non-coiled cable for P/N 79177CG switch box, pg 280
- 114913CG: Male to male coiled cable for P/N 114155CG switch box, pg 280
- 174772CG: Male to male
- 174908CG/205655CG: Male to male non-coiled
- 112627CG: Male to male non-coiled cable for P/N 79177CG switch box, pg 280



Quantity SAVE

Part No.	Description	Length	1	10	50
114913CG	5-pin DIN⊕	5' (gray)	\$4.95	\$4.21	\$3.16
177261CG	6-pin mini DIN⊕	2' (gray)	2.95	2.55	1.89
174772CG	6-pin mini DIN⊕	6' (black)	4.95	4.25	3.19
174908CG	6-pin mini DIN⊕	6' (gray)	5.75	5.15	4.65
112627CG	6-pin mini DIN⊕	10' (beige)	7.95	7.25	6.49
205655CG	6-pin mini DIN⊕	25' (beige)	8.95	7.95	6.95

We offer free technical documents for most of the products we carry. Find them easily on the product specification pages at www.jameco.com.

DB9 Extension Cables



- All lines connected straight through
- 132345CG/196365CG: DB9 female to DB9 female cable with thumbscrews
- 199638CG/25700CG/148515CG: DB9 male to DB9 female cable with thumbscrews
- 181665CG: DB9 male to DB9 male cable

Part No.	Description	1	10	100	1000
132345CG	6' F-F⊕	\$4.95	\$4.49	\$3.95	\$3.49
199638CG	6' M-F (blk)⊕	4.49	3.95	3.49	2.95
25700CG	6' M-F	4.95	4.49	3.95	3.49
196365CG	10' F-F⊕	6.95	6.25	5.59	4.95
148515CG	10' M-F⊕	7.49	6.79	5.99	4.95
181665CG	10' M-M⊕	6.95	6.25	5.59	4.95

9-Pin Test Cable

- DB9 M to DB9 F (6') Quantity SAVE
- Pin outs: 1-3, 2-2, 4-5



Part No.	Description	1	10	100
162915CG	DB9 male to DB9 female	\$2.95	\$2.51	\$1.88

DB9-to-DB25 AT-Adapter Serial Cables

- For DB9 serial ports which need to be converted to DB25 serial
- AT and compatibles
- Molded DB9 female to DB25 male connectors



Part No.	Description	1	10	100
109583CG	1' serial, beige⊕	\$4.35	\$3.95	\$3.49
189333CG	3' serial, beige⊕	3.95	3.39	2.55
207790CG	4' serial, beige	2.35	2.15	1.95
31721CG	6' serial, beige⊕	3.89	3.55	3.15
191361CG	6' serial, gray	4.39	3.99	3.15
155521CG	10' serial, beige⊕	3.95	3.55	3.15

DB25 Extension Cables

- All lines connected straight through
- Use to lengthen your standard serial cable or for switch box applications
- Thumbscrews to secure connectors
- Color: gray; except P/Ns 174001CG/175290CG: black*



Part No.	Description	Wt. (lbs.)	1	10	50	100
174001CG	3' M-M⊕*	0.6	\$4.79	\$4.35	\$3.89	\$3.49
401138CG	3' M-M⊕	0.4 ...	4.45	4.25	3.99	3.79
65787CG	6' M-M⊕	0.5 ...	6.49	5.89	5.29	4.89
39538CG	10' M-M⊕	0.7 ...	6.95	6.29	5.05	3.69
179979CG	15' M-M⊕	1.2 ...	6.95	6.26	5.63	5.07
67070CG	25' M-M⊕	1.4	10.95	9.95	8.95	7.95
180435CG	50' M-M⊕	3.6	14.95	13.49	11.95	9.95
164291CG	3' M-F⊕	0.4 ...	4.29	3.89	3.49	2.95
175290CG	3' M-F⊕*	0.4 ...	2.95	2.69	2.25	1.59
163133CG	5' M-F⊕	0.6 ...	5.29	4.75	4.29	3.85
67256CG	6' M-F⊕	0.6 ...	6.45	5.79	5.25	4.69
39511CG	10' M-F⊕	0.7 ...	6.95	6.26	5.63	4.61
177279CG	15' M-F⊕	1.0 ...	9.49	8.55	7.69	6.25
101995CG	25' M-F⊕	1.4	11.95	10.79	9.69	7.95
181201CG	50' M-F⊕	3.2	17.95	14.39	10.79	8.09
224266CG	6' F-F⊕	0.7 ...	4.95	3.95	2.95	2.09

USB 2.0 Cables



- Higher transfer rate up to 480Mbps
- Backward compatible w/ USB 1.1 products

USB-A Male to USB-A Male

Part No.	Description	1	10	25
326473CG	3' cable beige⊕	\$1.55	\$1.39	\$1.29
229681CG	6' cable beige⊕	1.65	1.49	1.39
222033CG	6' cable black⊕	1.65	1.49	1.39
229551CG	6' cable clear⊕	1.65	1.49	1.39
229690CG	10' cable beige⊕	1.89	1.75	1.65
222041CG	10' cable black⊕	1.89	1.75	1.65
229569CG	10' cable clear⊕	1.89	1.75	1.65
229702CG	15' cable beige⊕	2.85	2.59	2.49
222050CG	15' cable black⊕	2.85	2.59	2.49
229577CG	15' cable clear⊕	2.85	2.59	2.49

USB-A Male to USB-B Male

Part No.	Description	1	10	25
229711CG	3' cable beige⊕	\$1.55	\$1.39	\$1.29
222607CG	3' cable black⊕	1.55	1.39	1.29
229585CG	3' cable clear	1.55	1.39	1.29
229729CG	6' cable beige⊕	1.65	1.49	1.39
222009CG	6' cable black⊕	1.65	1.49	1.39
229593CG	6' cable clear⊕	1.65	1.49	1.39
229737CG	10' cable beige⊕	1.89	1.75	1.65
222017CG	10' cable black⊕	1.89	1.75	1.65
229606CG	10' cable clear⊕	1.89	1.75	1.65
229761CG	15' cable beige⊕	2.85	2.59	2.49
222025CG	15' cable black⊕	2.85	2.59	2.49
229614CG	15' cable clear⊕	2.85	2.59	2.49

USB-A Male to USB-A Female

Part No.	Description	1	10	25
326481CG	3' cable beige⊕	\$1.55	\$1.39	\$1.29
229770CG	6' cable beige⊕	1.65	1.49	1.39
222068CG	6' cable black⊕	1.65	1.49	1.39
229622CG	6' cable clear⊕	1.65	1.49	1.39
229788CG	10' cable beige⊕	1.89	1.75	1.65
222076CG	10' cable black⊕	1.89	1.75	1.65
229631CG	10' cable clear⊕	1.89	1.75	1.65
229796CG	15' cable beige⊕	2.85	2.59	2.49
222084CG	15' cable black⊕	2.85	2.59	2.49
229649CG	15' cable clear⊕	2.85	2.59	2.49

Digital Camera USB 2.0 Cables

- Color: black • Length: 6 ft.
- For use w/ digital cameras, memory card readers, etc.



Part No.	Product No.	1	10
673715CG	USB-A to mini 4-pin	\$2.99	\$2.65
673694CG	USB-A to mini 5-pin	2.75	2.35

USB 1.1 Cables

- Quantity SAVE
- USB-A Male to USB-B Male



Part No.	Description	1	10	25
308726CG	5' cable (black)	\$1.49	\$1.35	\$1.01
169359CG	6' cable	1.79	1.59	1.35

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

Color Code Legend
New Sale Lower\$ QtySave


USB-A Cables with Bracket

- Supports data transfer rates of 12Mbps
- Allows connection of two devices
- Dual USB-A female connectors
- 8" long



Part No.	Description	1	10	25
144813CG	Female panel mount	\$3.95	\$3.75	\$3.55
319652CG	Male panel mount	3.95	3.75	3.55

IEEE 1394 Firewire Cables



- Connect your computer to the latest high speed Firewire peripherals.
- IEEE-1394 compliant
 - UL approved
 - Molded connectors

4-pin Male to 4-pin Male

Part No.	Description	1	10	25
222631CG	3' cable black	\$4.99	\$4.45	\$3.95
175821CG	6' cable black	5.59	5.05	4.55
222244CG	10' cable black	6.99	6.25	5.65
222252CG	15' cable black	8.59	7.75	6.95

4-pin Male to 6-pin Male

Part No.	Description	1	10	25
222623CG	3' cable black	\$4.99	\$4.45	\$3.95
175839CG	6' cable black	5.59	5.05	4.55
222228CG	10' cable black	6.99	6.25	5.65
222236CG	15' cable black	8.59	7.75	6.95

6-pin Male to 6-pin Male

Part No.	Description	1	10	25
222615CG	3' cable black	\$4.99	\$4.45	\$3.95
175847CG	6' cable black	5.59	5.05	4.55
222201CG	10' cable black	6.99	6.25	5.65
222210CG	15' cable black	8.59	7.75	6.95

USB-to-DB9 Serial Adapter


- USB-A to DB9 male
- Length: 13"
- Supports automatic handshake mode
- Over 230kpbs data transfer rate
- 96 byte buffer each for upstream and downstream data flow
- Works with cellphones, PDA, digital cameras, modems and ISDN terminal adapters



Part No.	Description	1	10
387954CG	USB-A to DB9	\$17.95	\$16.15

Category 5e/5 Network Cables

- UTP
- 8P8C
- 24 AWG (7 x 43) stranded
- "Snagless" boot
- Color coded for easy wire tracing
- High-flexibility
- Achieve optimum system performance



Category 5e (350MHz)

Part No.	Length	Color	1	10	100
168292CG	3 ft.	Gray	\$1.79	\$1.49	\$1.39
168305CG	7 ft.	Gray	2.99	2.59	2.39
168313CG	15 ft.	Gray	5.29	4.39	3.99
168321CG	25 ft.	Gray	7.99	6.79	6.39
201777CG	3 ft.	Red	1.79	1.49	1.39
201785CG	7 ft.	Red	2.99	2.59	2.39
201793CG	15 ft.	Red	6.95	5.95	4.45
201806CG	25 ft.	Red	7.99	6.79	6.39
201697CG	3 ft.	Black	1.79	1.49	1.39
201700CG	7 ft.	Black	2.99	2.59	2.39
201718CG	15 ft.	Black	5.29	4.39	3.99
201726CG	25 ft.	Black	7.99	6.79	6.39
201734CG	3 ft.	Blue	1.79	1.49	1.39
201742CG	7 ft.	Blue	2.99	2.59	2.39
201751CG	15 ft.	Blue	5.29	4.39	3.99
201769CG	25 ft.	Blue	7.99	6.79	6.39
201814CG	3 ft.	Yellow	1.79	1.49	1.39
201822CG	7 ft.	Yellow	2.99	2.59	2.39
201831CG	15 ft.	Yellow	5.29	4.39	3.39
201849CG	25 ft.	Yellow	7.99	6.79	6.39

Category 5 (100MHz)

Part No.	Length	Color	1	10	100
281261CG	7 ft.	Gray	\$2.49	\$2.39	\$2.25
203051CG	10 ft.	Blue	2.75	2.48	2.23
277659CG	12 ft.	Black	2.99	2.69	2.45
277667CG	12 ft.	Yellow	2.99	2.69	2.45

☉ Blue Part No. = Limited Quantity Available

ATEN USB-to-Centronics Printer Cable

- Full compliance with the USB spec V.1.0
- USB-A male to 36-pin male centronics connector
- Supports true bidirectional communication
- Applicable to standard and bidirectional printers



SALE

Part No.	Description	1	10	25
155352CG	6' USB cable	\$23.75	\$22.56	\$21.43

USB to Serial Adapter with Prolific Chipset

This USB serial adapter provides an external Plug-and-Play RS-232 port for computers, notebooks, laptops, and handheld computing devices. Provides high-quality serial connections at transfer rates of more than 500kbps.



- Frees existing RS-232 ports for other uses
- Supports RS-232 serial interface, automatic hand-shake mode, remote wake-up & power management
- Provides a 96-byte buffer for each upstream and downstream data transfer
- Weight: 1.5 lbs.
- Full compliance with USB specification v.1.1
- 7" cable with DB25 male connector and 14" cable with USB-A connector
- Size: 2.7"L x 1.6"W x 0.7"H

System requirements: Windows®98/2000, USB host controlled installed in the system

Includes: 3.5" software and manual

Part No.	Description	1	5
213006CG	USB-A to serial converter	\$29.95	\$27.95

Flexible USB Cable and Adapter

FlexUSB™ is a compact, lightweight accessory that bends, rotates, and flexes to your desired angle. It provides a means to position USB devices, allowing you to use it with any computer, even in the most cramped environment. Its unique ratcheting design makes it possible to position your USB devices that are compatible with both Windows® and MAC platforms.



Part No.	Description	1	5
262078CG	Flexible USB adapter A M-F	\$10.95	\$9.85
262158CG	Flexible USB cable with A-M to B-M connectors	11.95	10.85

Flexible USB cables and adapters make plugging in cables an ease, especially in tight spots!

USB Gender Adapters

Part No.	Description	Dimensions	1	10	25
321251CG	USB-A male to USB-A male	1.9"L x 0.6"W	\$2.79	\$2.65	\$2.39
169383CG	USB-A male to USB-B female	1.3"L x 0.4"W	2.69	2.49	2.25
169375CG	USB-A female to USB-B male	1.7"L x 0.6"W	2.69	2.49	2.25
316806CG	USB-A female to USB-A female	1.5"L x 0.7"W	2.69	2.49	2.25
321699CG	USB-B male to USB-B male	2.0"L x 0.4"W	2.79	2.65	2.49
316822CG	USB-B female to USB-B female	1.4"L x 0.7"W	2.69	2.49	2.25



JAMECO ValuePro USB Keyboard Adapter

USB to PS/2

NEW

- USB-A female to 6-pin mini DIN male (PS/2)



Part No.	Description	1	10	25
316832CG	USB-A to PS/2	\$1.79	\$1.59	\$1.39

We're Listening to Your Requests

Email us 24/7 at
NewProducts@Jameco.com
with suggestions for products you'd like to see in future catalogs.

☉ RoHS compliant product ☉ This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. [Details on page 1.](#)

Category 6 Network Cables



- With RJ45 plugs and molded strain reliefs
- Assembled using ETL verified 24AWG stranded cable
- Gold over nickel contacts
- Exceeds performance levels as specified in TIA/EIA 568B.2-1 Category 6 draft 8

Category 6

Part No.	Length	Color	1	10	50
219707CG	3 ft.	Gray	\$2.79	\$2.69	\$2.56
219715CG	7 ft.	Gray	3.99	3.87	3.68
219723CG	14 ft.	Gray	6.59	6.37	6.05
219731CG	25 ft.	Gray	9.39	8.92	8.47
219740CG	50 ft.	Gray	14.29	13.58	12.90
219854CG	3 ft.	Blue	2.79	2.69	2.56
219862CG	7 ft.	Blue	3.99	3.87	3.68
219871CG	14 ft.	Blue	6.59	6.37	6.05
219889CG	25 ft.	Blue	9.39	8.92	8.47
219897CG	50 ft.	Blue	14.29	13.58	12.90
220003CG	3 ft.	White	2.79	2.69	2.56
220011CG	7 ft.	White	3.99	3.87	3.68
220020CG	14 ft.	White	6.59	6.37	6.05
220038CG	25 ft.	White	9.39	8.92	8.47
220046CG	50 ft.	White	14.29	13.58	12.90
219900CG	3 ft.	Red	2.79	2.69	2.56
219918CG	7 ft.	Red	3.99	3.87	3.68
219926CG	14 ft.	Red	6.59	6.37	6.05
219934CG	25 ft.	Red	9.39	8.92	8.47
219942CG	50 ft.	Red	14.29	13.58	12.90
219803CG	3 ft.	Green	2.79	2.69	2.56
219811CG	7 ft.	Green	3.99	3.87	3.68
219820CG	14 ft.	Green	6.59	6.37	6.05
219838CG	25 ft.	Green	9.39	8.92	8.47
219846CG	50 ft.	Green	14.29	13.58	12.90
219758CG	3 ft.	Black	2.79	2.69	2.56
219766CG	7 ft.	Black	3.99	3.87	3.68
219774CG	14 ft.	Black	6.59	6.37	6.05
219782CG	25 ft.	Black	9.39	8.92	8.47
219791CG	50 ft.	Black	14.29	13.58	12.90
219951CG	3 ft.	Yellow	2.79	2.69	2.56
219969CG	7 ft.	Yellow	3.99	3.87	3.68
219977CG	14 ft.	Yellow	6.59	6.37	6.05
219985CG	25 ft.	Yellow	9.39	8.92	8.47
219993CG	50 ft.	Yellow	14.29	13.58	12.90

CAT 5e/6 Crossover Cables

- Connect 2 PCs without a hub
- 24AWG (7 x 43) stranded
- Strain relief RJ45 connectors
- 4-pair • 8P8C • UTP



CAT 6

679762CG	3' cable RJ45	\$7.95	\$7.15	\$6.29
681096CG	7' cable RJ45	9.95	8.95	7.69

CAT 5e

Part No.	Description	1	10	100
681109CG	3' cable RJ45	\$2.95	\$2.65	\$2.39
681117CG	7' cable RJ45	4.75	4.45	3.75
302041CG	6' cable RJ45	3.75	3.39	3.05
685812CG	7' cable RJ45 (yellow)	4.75	4.45	3.75
169261CG	10' cable RJ45	6.95	6.25	5.59

♣ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

RoHS compliant product This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. [Details on page 1.](#)

Due to extraordinary copper market price fluctuations, cable and wire prices are subject to change.

JAMECO ValuePro Modular Plugs



P = No. of positions
 C = No. of contacts
 W/E = Western Electric type number

* Prepackaged: order in increments of 10, 100 or 1000

Part No.	Description	W/E	1	10	100	1000
103491CG	4P4C (handset)	616	*	\$.11	\$.099	\$.089
79290CG	6P4C (RJ11)	623	*	.12	.11	.095
79273CG	6P6C (RJ11)	623	.24	.22	.195	.18
79281CG	8P8C (RJ45) (for stranded wire)	641	.35	.28	.24	.20
119343CG	8P8C (RJ45) unshielded (for solid wire)	—	.49	.44	.35	.28
116610CG	8P8C (RJ45) shielded	—	1.09	.99	.89	.79
204231CG	8P8C (RJ45) shielded (for STP stranded wire)	—	1.41	1.36	1.09	.81
116601CG	8P8C (RJ45) shielded (for solid wire)	—	.99	.89	.80	.72
180646CG	10P10C (for stranded wire)	—	1.39	1.15	.82	.69

JAMECO ValuePro Modular Jacks



- Voltage rating: 150VAC max.
- Contact current rating: 1.5A max. @ 25°C
- Durability: 750 mating cycles
- PC mount Blue Part No. = Limited Quantity
- * W/E = Western Electric type number

Part No.	Description	W/E	1	10	100
199620CG	4P4C (handset) 0.48"W	—	\$.36	\$.33	\$.247
115128CG	4P4C (handset) 0.395"W	—	.37	.34	.31
151765CG	6P4C (RJ11) side flange	AMP	.45	.43	.39
105945CG	6P4C (RJ11) top flange	623	.62	.56	.42
204206CG	6P4C (RJ11) lead wires	—	.94	.85	.64
115836CG	6P6C (RJ11) side flange	—	.74	.67	.59
204177CG	6P6C (RJ11) dual	—	1.49	1.35	1.19
124038CG	6P6C (RJ11) 6" leads	—	1.25	1.15	.99
115844CG	8P8C (RJ45)	641	.48	.44	.40
204214CG	8P8C (RJ45) 0.81"L	—	1.22	1.11	.84
203449CG	8P8C (RJ45) shielded Pin spacing "A" = 0.055"	—	1.19	.99	.85

AMP

In-Line Coupler, Modular Jacks and Plugs

In-Line Coupler

- Housing: black polyphenylene oxide
- Panel mount thickness: 0.062" nominal
- Terminals: 0.018" diameter phosphor bronze with 50µ" gold over nickel



Part No.	Product No.	Position	1	25	50
524445CG	555052-1	8P8C	\$3.45	\$2.99	\$2.77

Single Port Modular Jacks

- Meets or exceeds FCC part 68 rules and regulations
- Current rating: 1.5A max. @ 25°C (derated)
- Voltage rating: 150VAC max.
- Dielectric withstanding voltage: 1000VACrms
- Contact: 0.014" thick phosphor bronze with 50µ" gold in contact area and 150µ" tin-lead on solder tails over nickel



Part No.	Product No.	Position	1	25	50
524453CG	555153-1	8P8C side entry, shielded low profile, face shield	\$1.33	\$1.26	\$1.20
524488CG	555416-1	8P8C top entry, unshielded	.39	.369	.352
524461CG	555164-1	8P8C side entry unshielded 12.6mm H	.55	.522	.497
524509CG	557969-1	8P8C shielded, top entry	.95	.91	.83
524517CG	558342-1	8P8C right angle shielded	1.75	1.52	1.45

Unshielded Modular Plugs

- Once piece construction with pre-loaded contacts
- Housing: polycarbonate UL94V-0 rated
- Terminals: 0.014" thick phosphor bronze underplated with 100µ" nickel, plated with 50µ" gold in contact region and gold flash on terminal
- Dielectric withstanding voltage: 1000VAC
- Meets FCC rules and regulations part 68 and TIA/EIA 568A



Part No.	Product No.	Position	1	25	50
524496CG	5-557315-3	8P8C for round solid cables	\$.50	\$.438	\$.395
524402CG	5-554169-2	8P8C for round stranded cables	.46	.423	.391
524411CG	5-554720-3	8P8C for flat oval solid cables	.50	.475	.428
524429CG	5-554739-3	8P8C for flat oval stranded cables	.46	.423	.399
524541CG	5-569278-3	8P8C for stranded cable, with load bar	.73	.71	.64
524525CG	5-558530-3	8P8C for stranded cable with load bar	.68	.66	.60
524533CG	5-558530-4	8P8C for solid cable with load bar	.69	.66	.60
524550CG	5-569532-3	8P8C for stranded cable, long body	1.65	1.49	1.35

Keystone-Type Wall Plates

• Size: 2.8"W x 4.5"H

Quantity SAVE

Part No.	No. of ports	Color	1	10	100
195549CG	1	Ivory	\$1.25	\$1.15	\$.86
195557CG	2	Ivory	1.25	1.15	.99
195565CG	3	Ivory	1.25	1.05	.79
195573CG	4	Ivory	1.25	1.05	.79
212978CG	1	White	1.25	1.15	.99
212994CG	2	White	1.25	1.15	.86
212986CG	3	White	1.25	1.15	.99
212960CG	4	White	1.25	1.15	.86
213508CG	Filler	White	.29	.25	.187



Keystone RJ-45 & RJ-11 Jacks

Modular Punchdown Type

- Removable jacks used in wall plates (shown above)
- CAT 5e classification
- Punchdown type wiring connections with color coding
- Size: 0.57"W x 0.63"H x 1.23"D
- RJ45: 8P8C RJ11: 6P6C



Part No.	Color	1	10	100
195590CG	Red	\$3.75	\$3.55	\$3.19
195602CG	Yellow	3.55	3.24	2.43
195611CG	Green	2.05	1.28	1.15
195629CG	Black	3.75	3.55	3.19
195637CG	Ivory	3.55	3.24	2.43
212951CG	Blue	3.75	3.55	3.19
212943CG	White	3.75	3.55	3.19

RJ11

Part No.	Color	1	10	100
213524CG	Black	\$3.75	\$3.55	\$2.66
213516CG	White	3.75	3.55	3.19

Keystone BNC/F-Type Jacks

- Removable jacks used in wall plates (shown above)
- Clip on for easy installation on wall plates



Part No.	Description	Color	1	10	100
195645CG	F-Type F to F	Ivory	\$.99	\$.90	\$.82
224637CG	BNC F to F	White	1.55	1.41	1.28

Blue Part No. = Limited Quantity Available

Network Connectors



CAT5e Coupler

Part No.	Fig.	Prod. No.	Description	1	10	100
615048CG	1	45-5439	RJ45 female	\$5.39	\$5.05	\$4.79

Quick LoQ Jack

Part No.	Fig.	Prod. No.	Description	1	10	100
615056CG	2	45-5529	CAT6 white	\$4.15	\$3.89	\$3.49
615064CG	2	45-5537	CAT3/4 ivory	4.15	3.89	2.97
615072CG	—	45-5533	CAT5 red	4.69	4.55	4.49

90°, 110 Punchdown Style

Part No.	Fig.	Prod. No.	Description	1	10	100
615081CG	3	45-5561	CAT5e, orange	\$4.15	\$3.89	\$2.97
615099CG	3	45-5569	CAT5e, white	4.05	3.72	3.57


180° IDC Toolless Design

Part No.	Fig.	Prod. No.	Description	1	10	100
615101CG	4	45-5576	CAT5e, yellow	\$3.15	\$2.95	\$2.79
615144CG	4	45-5837	CAT5e, ivory	2.59	2.45	2.29

Single Modular Jack Boxes


Part No.	Fig.	Prod. No.	Description	1	10	100
615110CG	5	45-5812	CAT5e, white	\$6.85	\$6.26	\$6.01
615128CG	5	45-5614	CAT5e, ivory	7.09	6.48	6.23

Modular Couplers and Adapters



Style 1 Reverse wiring for telephone systems

Style 2 Straight wiring for networking/printer sharing



Part No.	Description	Fig.	1	10	100
72207CG	6P4C male "T" adapter, Style 2. Provides 2 jacks from 1 line. Male modular plug (6P4C), 2 female modular receptacles (6P4C) RJ11	2	\$.99	\$.89	\$.80
71757CG	6P6C modular coupler, Style 1, RJ11	1	.95	.86	.79
135087CG	6P6C modular coupler, Style 2, RJ11	1	.99	.89	.79
181091CG	6P6C male "T" adapter, Style 2. Provides 2 jacks from 1 line. Male modular plug (6P6C), 2 female modular receptacles (6P6C) RJ11	2	.99	.89	.78
118501CG	8P8C modular coupler, Style 1, RJ45	1	1.85	1.75	1.55
135079CG	8P8C modular coupler, Style 2, RJ45	1	1.39	1.25	1.15
153023CG	8P8C modular coupler, Style 2 (for Cat. 5) RJ45	3	7.99	7.19	6.49

Modular Jack Boxes & Wall Plates



Fig. 1 W: 2.8" H: 4.5" Fig. 2 W: 2.8" H: 4.5" Fig. 3 W: 2.8" H: 4.7" Fig. 4 W: 2.0" H: 2.2" D: 0.9" Fig. 5 W: 1.5" H: 2.4" D: 1.1" Fig. 6 W: 2.4" H: 2.4" D: 1.1"

Part No.	Description	Fig.	1	10	100
72311CG	6P6C & 8P8C double wall jack plate w/ jacks (beige)	1	\$1.95	\$1.75	\$1.31
319839CG	8P8C triple wall jack plate w/ jacks (white) (CAT 6)	2	11.19	10.65	7.99
319821CG	8P8C quad wall jack plate w/ jacks (white) (CAT 5e)	3	11.75	11.15	8.36
103464CG	6P4C adhesive jack RJ11 (beige)	4	1.39	1.19	1.09
71984CG	6P6C adhesive jack RJ11 (beige)	4	1.39	1.19	.99
71651CG	8P8C adhesive jack RJ45 (beige)	4	1.95	1.65	1.45
213031CG	8P8C adhesive jack RJ45 (single, white) (CAT 5e)	5	3.29	2.99	2.69
213049CG	8P8C adhesive jack RJ45 (dual, white) (CAT 5e)	6	4.15	3.75	3.39

Banjo In-Line Modular Adapters

4/6/8 Pin 3-In-1


Adapter can be applied to any brand of butt sets, LAN cable testers, or tone generators.



Part No.	Prod. No.	Description	Price
673723CG	MT-8091	In-line modular adapters	\$24.39

This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

RS-232-to-RJ11/RJ45 Modular Jack Adapters

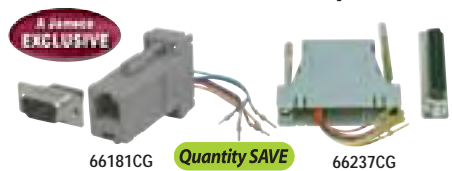


Change your RS-232 port to an RJ11 or RJ45 modular jack. This will allow you to use modular phone cable rather than RS-232 cable, thus simplifying networking applications. Comes complete with all necessary wiring and hardware.

Blue Part No. = Limited Quantity Available

Part No.	Description	1	10	100
204265CG	DB9 M to RJ11 (6P4C)	\$1.95	\$1.66	\$1.24
66181CG	DB9 M to RJ11 (6P6C)	2.59	2.35	2.09
66190CG	DB9 M to RJ45 (8P8C)	2.89	2.65	2.35
114737CG	DB9 F to RJ11 (6P4C)	1.95	1.79	1.59
66202CG	DB9 F to RJ11 (6P6C)	2.79	2.55	2.29
66211CG	DB9 F to RJ45 (8P8C)	2.99	2.69	2.45
204281CG	DB25 M to RJ11 (6P4C)	2.39	2.15	1.61
66229CG	DB25 M to RJ11 (6P6C)	2.95	2.35	1.99
66237CG	DB25 M to RJ45 (8P8C)	2.99	2.69	2.45
204273CG	DB25 F to RJ11 (6P4C)	1.95	1.75	1.31
66245CG	DB25 F to RJ11 (6P6C)	2.59	1.95	1.39
66253CG	DB25 F to RJ45 (8P8C)	2.89	2.59	2.29


Telco Adapters

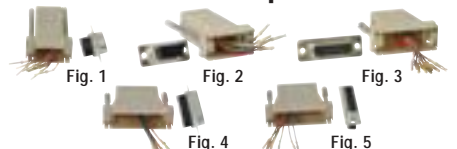

Part No.	Fig.	Prod. No.	Description	1	10	100
614969CG	1	45-5109	6C RJ12 to DB9 M	\$2.45	\$2.31	\$2.21
614977CG	1	45-5110	8C RJ45 to DB9 M	2.45	2.31	2.21
614985CG	2	45-5111	4C RJ11 to DB9 F	2.45	2.31	2.21
614993CG	2	45-5112	6C RJ12 to DB9 F	2.45	2.31	2.21
615005CG	2	45-5113	8C RJ45 to DB9 F	2.45	2.31	2.21
615013CG	3	45-5117	8C RJ45 to DB15 F	3.39	2.73	2.61
615021CG	4	45-5123	8C RJ45 to DB25 M	2.89	2.73	2.61
615030CG	5	45-5127	8C RJ45 to DB25 F	2.85	2.27	2.17

"EZ" RJ45 Connector

Strip the wire and insert into the plug & pull out the wire on the other side. This ensures correct conductor order and uniformity in crimping.



- For solid or stranded wire
- 8P8C plug
- Use standard modular crimping tool

Part No.	Product No.	1	10	100	250
158115CG	RJ45 (8P8C)	\$1.75	\$1.58	\$1.42	\$1.25

RJ11 Retractable Cable

This RJ11 cable extends up to 8'. And when you pack up, give it a tug and it retracts into its lightweight, rugged case like a windowshade. It's completely tangleproof.



Part No.	Description	Price
233349CG	RJ11 retractable cable	\$2.95


Modular Telephone/Printer Sharing Cables (Gray)

- RJ11 – 6P2C/6P4C for telephone or network
- RJ11 – 6P6C for telephone or printer sharing
- RJ45 – 8P8C for telephone or modem-dial-up use




Low Cost Data/Phone Cables

Style 1 – Reverse wiring for telephone systems



Style 2 – Straight wiring for networking/printer sharing



Part No.	Conn. Style	Type	Length	Pricing		
				1	10	100
189940CG	1	RJ11-6P2C	7ft.	\$.99	\$.84	\$.63
196226CG	1	RJ11-6P4C	7ft.	1.69	1.39	1.07
115553CG	2	RJ11-6P4C	7ft.	1.25	1.09	.89
355645CG	2	RJ11-6P4C	14ft.	2.19	1.59	1.38
115545CG	1	RJ11-6P4C	25ft.	2.29	2.09	1.85
201232CG	2	RJ11-6P4C	35ft.	1.95	1.66	1.24
115588CG	1	RJ11-6P6C	7ft.	1.55	1.35	1.15
115617CG	2	RJ11-6P6C	7ft.	2.19	1.99	1.79
355653CG	2	RJ11-6P6C	14ft.	2.75	1.99	1.73
115676CG	2	RJ45-8P8C	7ft.	1.89	1.75	1.49

† Beige ☉ Blue Part No. = Limited Quantity Available

Surface Mount Boxes

Category 5 and 5e

- RJ45 • 8P8C • 100MHz
- Size: 2.6"L x 3.2"W x 1.2"H
- CAT 5e (except P/N 176073CG)



Part No.	Description	1	10	100
213014CG				
176073CG	Single jack (beige)	\$5.75	\$5.25	\$4.95
213014CG	Dual jack (white)	7.19	6.53	5.93

RJ45-Plug Color Caps (Boots)

- Round strain relief
- 10 piece minimum
- Quantity SAVE



☉ Blue Part No. = Limited Quantity Available 204425CG

Part No.	Color	10	100	500	1000
204409CG	Black ☉ ☉	\$.14	\$.13	\$.12	\$.09
204388CG	Yellow ☉	.18	.16	.14	.105
204353CG	Gray ☉	.14	.13	.12	.09
204361CG	Blue ☉	.18	.16	.14	.105
204425CG	Red ☉	.14	.12	.11	.083
204396CG	Green ☉	.14	.12	.098	.073
204370CG	Ivory ☉	.14	.12	.098	.073

Retractable Cord

- Length: 24', 12"
- 4 conductors
- 18 AWG (42 x 34)
- Bare copper, rubber insulated, cabled with fillers
- Black neoprene jacket
- Voltage Rating: 300V
- UL listed and CSA certified




Part No.	Product No.	1	10	100
481895CG	9482	\$25.75	\$24.51	\$23.27


☉ This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

Cable Tie Mounts and Cable Clamps

- Tie mount and screw tab cable clamps
- Material: UL approved nylon 66, 94V-2
- Sold in increments of 10, 100 or 1000
- ☉ Blue Part No. = Limited Quantity Available



182941CG/171213CG
 71407CG/71394CG
 71386CG



70594CG



182300CG/173761CG



182318CG/182376CG



182334CG/182342CG



173711CG/173729CG
 173737CG/134754CG
 173753CG

Part No.	Cross Ref. No.	Description	10	100	1000
182941CG	0505HC-101S ☉ ☉	4-way cable tie mount, self adhesive, .75"D	\$.07	\$.055	\$.052
171213CG	HC-100 ☉ ☉	4-way cable tie mount, self adhesive, use w/ 0.1"W max., 0.5" square	.15	.13	.094
71407CG	HC-101 ☉	4-way cable tie mount, self adhesive, use w/ 0.1"W max., 0.9" square	.18	.16	.13
71394CG	HC-102 ☉	4-way cable tie mount, self adhesive, use w/ 0.2"W max., 1.1" square	.23	.19	.14
71386CG	HC-103 ☉	4-way cable tie mount, self adhesive, use w/ 0.4"W max., 1.1" square	.25	.19	.13
70594CG	HC-0 ☉	4-way cable tie, screw type, use w/ 0.2"W max., 0.8"L x 0.4"W	.15	.09	.05
182300CG	0510HC-2 ☉	Cable tie mount, 1/4" screw hole, 0.5"D	.17	.15	.14
173761CG	HC-1 ☉	Cable tie, saddle type, 0.6"L x 0.4"W	.15	.125	.075
182318CG	0519ATC-17 ☉	2-way adjustable tie mount, #6 flat head screw, 0.7"D	.37	.35	.321
182376CG	0519ATC-22	2-way adjustable tie mount, #6 flat head screw, 0.9"D	.29	.261	.222
182334CG	0520FC-1 ☉	Cable tie mount, self adhesive, 0.1"D	.17	.15	.113
182342CG	0520FC-2 ☉	Cable tie mount, self adhesive, 0.2"D	.15	.135	.122
173711CG	UC0 ☉	Cable clamp for 1/8" cable	.08	.027	.02
173729CG	UC0.5 ☉	Cable clamp for 3/16" cable	.035	.032	.019
173737CG	UC1 ☉	Cable clamp for 1/4" cable	.14	.09	.063
134754CG	B0375 ☉	Cable clamp for 3/8" cable	.08	.029	.018
173753CG	UC3 ☉	Cable clamp for 1/2" cable	.099	.041	.031

Cable Ties



Pan Ty Cable Ties

- Miniature to standard cross sections feature a curved tip for easy threading and handling
- Lowest threading force of any one piece cable tie in the industry
- Natural nylon

Barb Ty Cable Ties

- Weather resistant nylon has greater resistance to ultraviolet light which damages natural nylon
- Stainless steel locking barb provides infinite adjustability over its entire length
- Black nylon

Cable Tie Mounts

- Unique cradle design provides maximum stability for cable bundle
- Nylon
- Low profile design keeps bundle close to mounting surface where overhead space is limited

Cable Tie Label

- Dot matrix
- White Tedlar®
- Designed to identify all sizes of wires and cables quickly and economically
- Overlaminates protects legend for clear, permanent identification

These products ship from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

See Our Panduit Cable Ties Offering at www.jameco.com/Prod/PanduitTies

Nylon Cable ID Ties and Tabs



71061CG: Clear ID tab (0.98" x 0.31")
 135175CG: Nylon cable tie ID marker

- Sold in increments of 10, 100 or 1000

Part No.	Size	10	100	1000
71061CG	4.0"L x 0.1"W ☉	\$.085	\$.08	\$.072
135175CG	2.0"L x 0.8"W x .02"T ☉	.22	.11	.08

Round-Type Strain Relief Bushings

- Material: UL approved nylon 66, 94V-2
- Color: black
- Used extensively for protecting cords and to prolong cord life



- Sold in increments of 10, 100 or 1000

Part No.	Cable Type	Lgth (in.)	10	100	1000
182351CG	SVI/SVT ☉	.43	\$.05	\$.043	\$.032
182369CG	SJ/SJT; 16 AWG ☉	.58	.18	.10	.085
182377CG	SJC; 18 AWG	.58	.24	.22	.20

Bushing Assembly Tool

- For use with strain relief bushings, above



Part No.	Description	1	10	100
73470CG	Bushing tool ☉	\$40.69	\$38.44	\$30.46

For more tools see pages 306 - 313.



RoHS Compliant Product
RoHS Also Available


Details on Page 1

Color Code Legend
New Sale Lower\$ QtySave

Call for OEM pricing

Nylon Cable Ties

Standard



70560CG



- Cable ties made from UL approved Nylon 66
- Temperature range: -40°C to +85°C
- Flammability rating: UL 94V-2
- Color: clear (except P/N 182676CG white)
- Sold in increments of 100 or 1000

Blue Part No. = Limited Quantity Available

Part No.	Tensile Strength (lbs.)	Dimensions (L" x W")	100	1000
70560CG	18⊕	3.1 x 0.10	\$.025	\$.015
126543CG	18⊕	4.0 x 0.10	.020	.014
182676CG	18⊕*	4.75 x 0.13	.030	.025
182650CG	18⊕	5.5 x 0.13	.035	.025
139150CG	18⊕	8.0 x 0.10	.060	.040
182668CG	18⊕⊕	8.0 x 0.13	.075	.050
182684CG	18⊕⊕	8.0 x 0.18	.036	.033
70906CG	40⊕⊕	5.8 x 0.10	.035	.029
190756CG	40⊕	10.0 x 0.14	.120	.086
190772CG	40⊕	11.0 x 0.19	.100	.075
190764CG	40⊕	13.0 x 0.14	.100	.075

* White

Weather Resistant



104141CG



- Contains Carbonate A for greater resistance to ultraviolet rays in outdoor use
- Color: black
- Sold in increments of 100 or 1000



Part No.	Tensile Strength (lbs.)	Dimensions (L" x W")	100	1000
139125CG	18⊕	3.0 x 0.90	\$.045	\$.034
104141CG	18⊕	4.0 x 0.10	.044	.029
104133CG	40⊕	5.8 x 0.10	.047	.031
190781CG	40⊕	8.0 x 0.13	.085	.065
190800CG	40⊕	10.0 x 0.14	.100	.090
190802CG	40⊕	13.0 x 0.14	.113	.088

Cable Tie Assortments

- Tensile strength: 18-50 lbs.

145701CG: 1000 pcs. (4"L); 10 colors

150412CG: 500 pcs. (4"L); 300 pcs. (8"L); 50 pcs. (11"L), 5 colors



Part No.	Wt. (lbs.)	1	10	50
145701CG	0.7⊕	\$9.49	\$8.49	\$7.39
150412CG	1.7⊕	16.49	15.25	14.15

Contractor Grade Cable Ties

Chances are we have a cable tie for your application! Avery Dennison™ cable ties are available in a wide variety of sizes and in three different materials.



These products ship from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

See Our Avery Dennison Cable Ties Offering at www.Jameco.com/Prod/AveryTies

Self Adhesive Wire Marker

- 90 markers per number
- Stick to wires for permanent identification
- Cloth tape label numbered 0-9
- Used after or before terminal



Part No.	Cross Ref. No.	1	10
182262CG	0215WMB-1 ⊕	\$7.09	\$6.45

3M Tape Wire Marker

- For marking wires with numerical sequence
- Self adhesive tapes numbered 0-9
- Size: (tape) 96"L x 0.25"W



Part No.	Description	1	10
159231CG	Numerical tape dispenser	\$32.95	\$28.90

3M ScotchCode™ STD-C Wire Marker Tape Dispenser

The 3M™ ScotchCode™ tape dispenser is a compact, carry-along dispenser with ten refillable compartments that hold eight-foot rolls of non-smear polyester tape. Used for marking binder groups, wire or cable, the tapes' high tack, acrylic adhesive resists solvents, oil and water, and adheres firmly to insulation surfaces. An end-loop hooks the dispenser easily to a tool pouch or belt.



Part No.	Description	1	5
652164CG	Marker tape dispenser	\$33.69	\$32.85

Cable Markers

- UL approved natural nylon
- 10 piece minimum



Part No.	Size	10	100	1000
182705CG	1.5"L x .75"W ⊕	\$.10	\$.09	\$.08
182713CG	2.5"L x 1.76"W ⊕	.25	.23	.173

Cable Tie Tool

- 2.5 - 5mm width (of cable)
- Tension adjustable
- Twist to cut surplus tie end
- Spring return action • Metal



Part No.	Cross Ref. No.	1	5	10
182297CG	0302TG-7 ⊕	\$16.99	\$15.99	\$14.99

Wire Management Enclosure


The "NO MORE MESS" wire management solution for workstations, home office, and entertainment systems. Wall mountable, this enclosure prevents wire tangles and clutter, protects wires and connections from accidents, and neatly conceals wires of varying thickness. Made of durable, high impact molded resin. An innovative design that optimizes wire storage capacity.



- Size: 14.1"H x 8.0"W x 2.1"D • Color: black

Part No.	Description	1	10
355872CG	Wire management enclosure	\$17.99	\$17.57

Nail-In Cable Clips



190828CG

190861CG

- Material: impact resistant PE
- With nails inserted
- Sold in increments of 100 or 1000
- Blue Part No. = Limited Quantity Available

SALE

For telephone cords; white

Part No.	Cross Ref. No.	W x H x H1 (in.)	100	1000
190828CG	NF1.2 ⊕	.24 x .21 x .15	\$.006	\$.005
190836CG	NF1.6 ⊕	.31 x .31 x .20	.006	.005

For general round cables; gray

Part No.	Cross Ref. No.	W x H x H1 (in.)	100	1000
190861CG	NCO.35N	.14 x .23 x .15	\$.022	\$.02
190887CG	NC1N ⊕	.24 x .35 x .26	.05	.02
190895CG	NC2N	.31 x .45 x .34	.015	.014
190908CG	NC3N	.39 x .53 x .41	.016	.015

Cable Clips

These nail-in cable clips are designed for use with RG-6 cables.

Lower \$\$\$

- For RG-6 type cables
- Includes 1" nail
- Prepackaged and sold in increments of 100



Part No.	Description	100	1000
295603CG	Single RG-6 cable clip, white	\$.034	\$.028
295591CG	Single RG-6 cable clip, black	.032	.027
295611CG	Dual RG-6 cable clip, white	.035	.029
295620CG	Dual RG-6 cable clip, black	.037	.03

3M Adhesive Cord Clips

Organize cords behind computers, appliances and entertainment centers. They remove cleanly and may be reused with a new Command™ adhesive strip. Holds wires up to 3/8 inch in diameter. 4 medium clips and 5 small adhesive strips per pack.



Part No.	Description	1	10
645861CG	Adhesive cord clips	\$3.89	\$3.44

3M Small Cord Clips

3M™ Cord Clips with Command™ Adhesive help organize all of those unsightly cords that run from the back of computers, appliances and home entertainment centers. They mount easily to any clean wall or finished wood surface and can be moved just as easily with replacement adhesive strips. 4 clips and 5 small adhesive strips per pack.



Part No.	Description	1	10
645853CG	Adhesive cord clips	\$3.49	\$3.12

3M Heat Shrink Tubing Kit

3M™ FP-301 is a heat shrinkable flexible polyolefin tubing that offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications. Rated for 275°F (135°C) continuous operation.



285481CG: Black 102 pieces

- Assorted pre-shrink sizes: 3/16" (30 pieces); 1/4" (28 pieces); 3/8" (20 pieces); 1/2" (14 pieces); 3/4" (6 pieces); 1" (4 pieces) • Pre-cut to 6" lengths

645976CG: Assorted Colors 133 pieces

- 7 colors: black, red, white, yellow, blue, green and clear
- Assorted pre-shrink sizes: 3/32" (35 pieces); 1/8" (28 pieces); 3/16" (21 pieces); 1/4" (21 pieces); 3/8" (14 pieces); 1/2" (14 pieces) • Pre-cut to 6" lengths

Part No.	Description	1	5	10
285481CG	Black 102-pc. kit	\$56.95	\$53.70	\$50.99
645976CG	Colors 133-pc. kit	\$6.95	\$3.70	\$0.99

Heat Shrink Tubing

- 2:1 uniform shrink ratio
 - Color: black
- ### Polyolefin Tubing
- Shrink temp: 90°C
 - Only sold in 10' & 100' lengths



Part No.	Dia. Before (mm)	Length (ft.)	1	25
644834CG	0.12" (3)	10	\$1.19	\$1.13
644851CG	0.12" (3)	100	10.49	9.99
644869CG	0.16" (4)	10	1.39	1.29
644877CG	0.16" (4)	100	12.49	11.85
644906CG	0.20" (5)	10	1.55	1.47
644914CG	0.20" (5)	100	14.99	14.25
644931CG	0.24" (6)	10	1.69	1.64
644949CG	0.24" (6)	100	16.49	15.67
644957CG	0.31" (8)	10	1.89	1.79
644965CG	0.31" (8)	100	17.99	17.49
644973CG	0.43" (11)	10	2.79	2.69
644981CG	0.43" (11)	100	24.99	23.75
644990CG	0.59" (15)	10	3.69	3.49
645001CG	0.59" (15)	100	35.99	34.19

PVC Flat Film


- Shrink temperature: 175°C
- Temperature range: -45°C to +125°C
- Pre-cut 39" length; sold as 1 increment



Part No.	Unshrunk		Shrunk		1*	10*	100*
	Flat	Cir. Dia.	Cir. Dia.				
70631CG	5/16"	1/4"	1/8"	1/8"	\$1.69	\$1.55	\$1.16
70623CG	1/2"	5/16"	3/16"	3/16"	1.69	1.44	1.08

Polyolefin Flexible Tubing

- Dielectric strength: 1300V
- Flame retardant
- Shrink temp.: 90°C • Temp. range: -45°C to +125°C
- Pre-cut 39" length (1 meter); sold as 1 increment



Blue Part No. = Limited Quantity Available

Part No.	Before Dia. (mm)	1*	10*	100*
71327CG	.059" (1.5)	.55	.46	.41
71871CG	.079" (2.0)	.55	.45	.39
71280CG	.098" (2.5)	.69	.59	.54
72063CG	.197" (5.0)	.89	.76	.57
216477CG	.275" (7.0)	.99	.89	.79
226245CG	.375" (9.5)	1.09	.98	.88

This product ships from a separate warehouse and may not ship the same day. Each warehouse will accrue separate shipping charges. Sorry, we're unable to ship COD.

RoHS compliant product This product is available in both RoHS and non-RoHS versions. Add an "R" before part number for RoHS version. [Details on page 1.](#)

Color Code Legend
New Sale Lower\$ QtySave



Polyolefin Heat Shrink Tubing

FIT-221B Series

Insulation from environment and resistance from water fungus and UV light. Use for general purpose insulation and repair, wire and cable harnessing/bundling, cable and connector protection, and wire and tubing splicing and connecting.

- Operating temp: -55°C to 135°C
- Shrinkage ratio: 2:1 @ 121°C
- Dielectric strength: 500V/mil (197kV/cm)
- Volume resistivity: 10¹⁴Ω-cm



NEW

Black (4 ft.)

Part No.	Product No.	Min./Max. ID (ins.)	1	5	25
419101CG	FIT221B-3/64	.046/.023	\$.61	\$.55	\$.53
419127CG	FIT221B-1/16	.063/.031	.62	.56	.55
419143CG	FIT221B-3/32	.093/.046	.66	.59	.58
419160CG	FIT221B-1/8	.125/.062	.71	.64	.63
419186CG	FIT221B-3/16	.187/.093	.86	.77	.76
419207CG	FIT221B-1/4	.250/.125	1.09	.97	.96
419223CG	FIT221B-3/8	.375/.187	1.21	1.08	1.07
419240CG	FIT221B-1/2	.500/.250	1.37	1.22	1.21
419266CG	FIT221B-3/4	.750/.375	2.05	1.80	1.79
419282CG	FIT221B-1	1.00/.500	3.05	2.74	2.73

Black (6 in.)

Part No.	Product No.	Min./Max. ID (ins.)	1	5	25
419389CG	FIT221B-3/64	.046/.023	\$11.95	\$11.36	\$10.54
419400CG	FIT221B-1/16	.063/.031	11.95	11.36	10.54
419426CG	FIT-221B-3/32	.093/.046	11.65	11.05	10.31
419442CG	FIT221B-1/8	.125/.062	11.55	11.04	10.36
419469CG	FIT221B-3/16	.187/.093	11.65	11.05	9.66
419485CG	FIT221B-1/4	.250/.125	11.95	11.31	10.52
419506CG	FIT221B-3/8	.375/.187	11.55	10.95	10.22
419522CG	FIT221B-1/2	.500/.250	11.45	10.61	9.66
419549CG	FIT221B-3/4	.750/.375	10.55	9.98	9.66
419565CG	FIT221B-1	1.00/.500	12.29	11.66	10.54

Clear (4 ft.)

Part No.	Product No.	Min./Max. ID (ins.)	1	5	25
419119CG	FIT221B-3/64	.046/.023	\$.71	\$.64	\$.63
419135CG	FIT221B-1/16	.063/.031	.73	.68	.67
419151CG	FIT221B-3/32	.093/.046	.80	.74	.68
419178CG	FIT221B-1/8	.125/.062	.90	.81	.78
419194CG	FIT221B-3/16	.187/.093	1.10	.98	.95
419215CG	FIT221B-1/4	.250/.125	1.36	1.18	1.12
419231CG	FIT-221B-3/8	.375/.187	1.55	1.37	1.32
419258CG	FIT221B-1/2	.500/.250	1.75	1.55	1.40
419274CG	FIT-221B-3/4	.750/.375	2.45	2.29	2.14
419291CG	FIT-221B-1	1.00/.500	3.45	3.22	2.94

Clear (6 in.)

Part No.	Product No.	Min./Max. ID (ins.)	1	5	25
419397CG	FIT221B-3/64	.046/.023	\$12.35	\$11.72	\$10.54
419418CG	FIT221B-1/16	.063/.031	11.95	11.35	10.54
419434CG	FIT221B-3/32	.093/.046	11.55	10.95	10.22
419451CG	FIT221B-1/8	.125/.062	12.75	12.08	10.54
419477CG	FIT221B-3/16	.187/.093	11.55	10.95	9.66
419493CG	FIT221B-1/4	.250/.125	12.35	11.72	10.54
419514CG	FIT221B-3/8	.375/.187	11.55	10.95	10.22
419531CG	FIT221B-1/2	.500/.250	11.45	10.61	9.66
419557CG	FIT221B-3/4	.750/.375	11.95	11.35	9.66
419573CG	FIT221B-1	1.00/.500	11.95	11.35	10.60

TECHFLEX® FLEXP® Clean-Cut Braided Sleeve

- Dense braid structure provides fuller coverage
- Fray resistant when cut with scissors
- Cut and abrasion resistant
- Maintains properties across wide temperature range
- Color: black
- UV resistant
- Length: 25 feet



Part No.	Product No.	Min/Max Flex (in.)	Inside Dia. (in.)	Outside Dia. (in.)	1	10
690013CG	CCPO.75BK25	5/8 - 1	0.750	0.798	\$13.09	\$12.45
690021CG	CCP1.00BK25	3/4 - 1 3/16	1.000	1.048	14.49	13.99
690030CG	CCP1.25BK25	1 - 1 1/2	1.250	1.298	17.09	16.49
690048CG	CCP1.5BK25	1 1/4 - 2	1.500	1.548	21.15	20.39

TECHFLEX® FLEXP® PET Braided Sleeve

- Braided from 10 mil polyethylene terephthalate monofilament yarns
- UL recognized component
- High tensile strength
- Maintains properties across wide temperature range
- Conforms to FMVSS 302
- Color: black
- UV resistant
- Length: 25 feet



Part No.	Product No.	Min/Max Flex (in.)	Inside Dia. (in.)	Outside Dia. (in.)	1	10
693679CG	PTNO.25BK25	1/8 - 7/16	0.250	0.300	\$6.05	\$5.75
693687CG	PTNO.38BK25	3/16 - 5/8	0.375	0.425	8.89	8.45
695383CG	PTNO.50BK25	1/4 - 3/4	0.500	0.550	10.55	9.99
695391CG	PTNO.75BK25	1/2 - 1 1/4	0.750	0.800	15.85	15.05
695412CG	PTN1.25BK25	3/4 - 1 3/4	1.250	1.300	19.09	18.15

TECHFLEX® Cable Sleeve

Clean Cut Expandable Sleeving

- Flame resistant
- Operating temp.: -70°C to 125°C
- Applications: protecting wires, cables and hoses
- Sold in spools of 25'

Part No.	Product No.	Actual/Expanded Dia.	1	10
162157CG	CCPT2X	0.250"/0.440"	\$15.95	\$14.95
162165CG	CCPT3X	0.500"/0.750"	17.95	14.49

JAMECO ValuePro

Audio/Video Cables and Adapters

Quantity SAVE

RCA Cables

Part No.	Description	1	10	25
228443CG	3' stereo RCA (2) male to (2) male plugs, gold plated	\$1.49	\$1.39	\$1.29
183311CG	4' RCA male to male plug (black)	.99	.89	.79
206973CG	4' RCA male to male plug (yellow)	.99	.89	.79
106374CG	6' RCA male to male plug	1.19	1.02	.94
228419CG	6' mono RCA male plug to female jack	1.65	1.45	1.25
228486CG	6' RCA stereo (2) male plugs to (2) female jacks	1.25	1.15	1.05
228451CG	6' RCA stereo (2) male to (2) male plugs, gold plated	1.79	1.69	1.59
228401CG	6' RCA stereo (2) male plugs to 3.5mm stereo male plug	1.55	1.39	1.25
228427CG	10' RCA female jack to male plug	2.35	1.95	1.79
29348CG	10' RCA male to male plug (yellow)	1.69	1.55	1.35
228460CG	12' RCA stereo (2) male to (2) male plugs, gold plated	2.09	1.89	1.75
225980CG	12' RCA (3) male to (3) male plugs, gold plated	4.49	3.89	2.89
225998CG	20' RCA (3) male to (3) male plugs, gold plated	7.99	6.79	5.09
228435CG	25' mono RCA male to male plug, nickel plated	2.19	2.09	1.99
228478CG	25' RCA stereo (2) male to (2) male plugs, gold plated	2.39	2.29	2.19

Video/Audio Patch Cables

Part No.	Description	1	10	25
228216CG	3' stereo video patch cable, gold plated	\$1.19	\$1.13	\$1.07
228574CG	25' stereo video patch cable, gold plated	6.99	6.29	5.65
228582CG	50' stereo video patch cable, gold plated	12.59	11.35	10.19



3.5mm Audio Patch Cables

Part No.	Description	1	10	25
319206CG	27' 3.5mm mono male to male plug	\$1.09	\$0.94	\$0.89
326511CG	1' 3.5mm stereo male to male plug	1.75	1.35	1.01
664288CG	3' 3.5mm stereo male to male plug (black)	1.09	.99	.75
326529CG	6' 3.5mm stereo male to male plug (green/blue)	1.39	1.18	.89
228494CG	6' 3.5mm stereo male to male plug (black)	1.39	1.19	.99
228515CG	6' 3.5mm stereo male plug to female jack	1.49	1.35	1.25
228507CG	12' 3.5mm stereo male to male plug (black)	1.69	1.49	1.29
228523CG	12' 3.5mm stereo male plug to female jack	1.65	1.49	1.35

JAMECO ValuePro

S-VHS Cables and Adapters

Low-loss fully shielded Super-VHS cables, 4-contact mini DIN plus S-VHS cable and dual-RCA plug stereo cables.

- Fully-molded color coded gold RCA connectors
- Flexible black PVC jacket
- Applications: home theaters, DSS receivers, Super-VHS VCRs, camcorders, and DVD players

228558CG/228566CG: 95% spiral wound shield S-VHS/audio conductors

Part No.	Description	1	10	25
228591CG	6' S-VHS video cable, gold plated	\$2.15	\$1.95	\$1.79
228558CG	6' S-VHS audio-video cable, gold plated	12.95	11.65	10.49
228566CG	12' S-VHS audio-video cable, gold plated	14.95	13.45	12.15
228603CG	12' S-VHS video cable, gold plated	2.65	2.35	2.10
228611CG	25' S-VHS video cable, gold plated	4.05	3.85	3.65
229809CG	S-video 4-pin mini DIN female to female jack	2.85	2.59	2.29
229391CG	S-video male plug to RCA video female jack	5.39	4.85	4.39
295881CG	S-video female jack to RCA video male plug	5.39	4.85	4.39
303351CG	S-video male plug to RCA video female jack	5.39	4.85	4.39

Other Manufacturers — Great Deals

682662CG	S-video M-M plug 6'	\$1.95	\$1.79	\$1.59
683075CG	S-video M-RCA female jack adapter	4.95	4.49	3.59

BNC To RCA Cable

Fully molded nickel connectors. Used for displays that require a single BNC connection from a PAL/NTSC video source.

Part No.	Description	1	10	50	100
683059CG	RG-59 BNC to RCA cable	\$3.95	\$3.49	\$2.95	\$2.19

Our goal is to provide you with more of what you want. Let us know how we can better serve your electronics needs. Please send your requests to NewProducts@Jameco.com.

JAMECO ValuePro

3.5mm Female Jacks and Male Plugs



- Threaded screw on housing
- 1mm diameter solder eyelets
- Shield crimp tabs

231159CG/231167CG: With spring strain relief Blue Part No. = Limited Quantity Available

Part No.	Cross Ref. No.	Description	1	10	100	1000
109495CG	PJ035PM	Mono F jack, 3.5mm hole size	\$0.45	\$0.40	\$0.36	\$0.27
165729CG	PJ0354	Mono F jack, 3.5mm hole size	.69	.59	.49	.39
101151CG	PJ1035	Mono male plug, plastic	.49	.38	.35	.29
147344CG	PJ1035L	Mono male plug, plastic	.49	.38	.35	.29
231159CG	AP-336	Mono male plug, metal	1.25	1.19	1.09	.95
231175CG	AP-340	Stereo male plug, plastic	.55	.43	.36	.32
231167CG	AP-343	Stereo male plug, metal	1.79	1.60	1.45	1.30

Component Video and Audio Cables

- Low-loss 75Ω oxygen-free copper center conductors and foam dielectric provide maximum signal transfer bandwidth for improved picture quality and performance
- Corrosion resistant, precise 24k gold-plated connectors ensure long lasting quality
- Fully molded color coded connectors attached to an ultra-flexible PVC jacket provide excellent strain relief, easy installation, and identification
- 100%, 0.012mm aluminum-polyester foil shielding and spiral-wound copper-braid shielding provides clear, noise-free, vivid picture quality

Part No.	Description	1	2	5
228620CG	6' component video RGB cable	\$9.99	\$8.99	\$7.96
228638CG	12' component video RGB cable	19.95	17.95	16.16
228646CG	25' component video RGB cable	25.95	23.36	21.02
229403CG	6' component video RGB and stereo audio cable	14.95	13.46	12.11
229411CG	12' component video RGB and stereo audio cable	25.95	23.36	21.02
229420CG	25' component video RGB and stereo audio cable	29.95	26.96	23.86